MAGNETIC BRAKE SYSTEMS

A DIVISION OF TECHNICAL FILM SYSTEMS, INC.

DYNAMOMETER DATA SHEET

(Version 1.1)

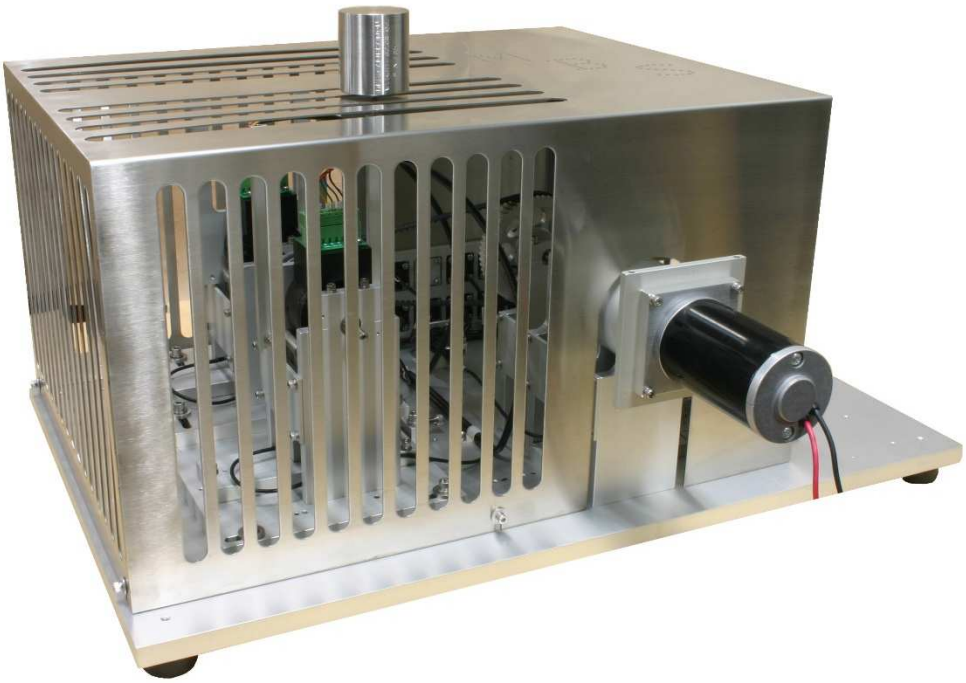

MODELS:

DB6B-2.4T-FM **DB6M-2.4T-FM**
DB6B-2.4T-BM **DB6M-2.4T-BM**

Max continuous power dissipation:	2 HP (1.49 kilowatts)
Max continuous brake torque:	134 in-oz. (94 N-cm)
Max brake speed:	15,000 RPM

4650 Calle Quetzal • Camarillo, CA 93012-9101 • Phone: 805.383.6903
E-Mail: sales@magbrakesystems.com • Website: www.magbrakesystems.com

TABLE OF CONTENTS

1. OVERVIEW

This data sheet is a reference for the performance specifications of the dynamometer models listed on the cover page.

The MBS dynamometers may be used to test just about any type of motor (i.e. electric, hydraulic, pneumatic, reciprocating). Types of testing include: endurance testing, speed versus torque curves, measure stall torque, efficiency, temperature rise, performance verification, etc. MBS dynamometers are sold as complete systems (shown in image below) that include: the dynamometer, controller, computer with software, calibration weight, manual and all cables. MBS systems do not require annual fees, licenses or permits. The software is user friendly, easily configurable (i.e. changing units, display scale limits, data acquisition rate, etc.) and has some safety precautions build in to prevent damage to the motor under test and/or the system (i.e. brake temperature sensor, setting current limit, setting power limit, trigger input signals).

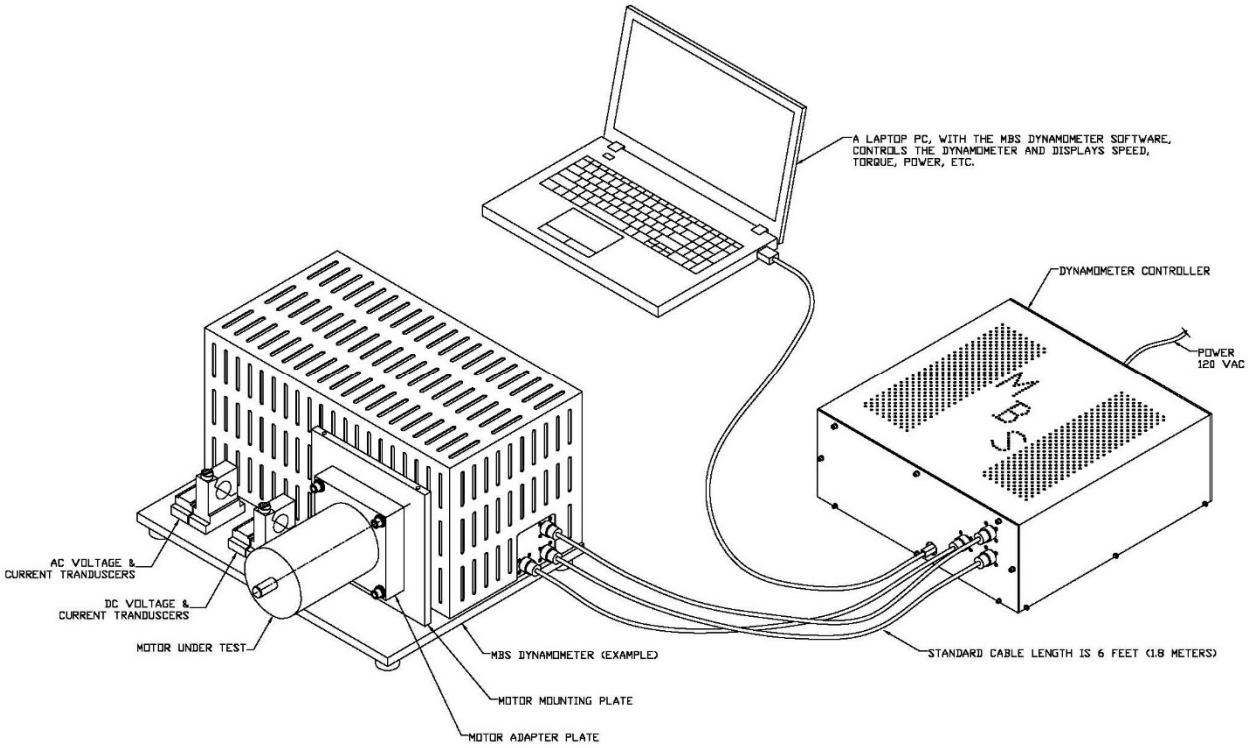

The nomenclature of the dynamometer model number is described at the end of this document. The power dissipation rating for this system is located on the bottom of the cover page. This data sheet may also be used to determine the best configuration for a system.

Dynamometers, or more specifically the size of the brakes for the dynamometers, are selected based on the required power dissipation and required torque.

A belt coupled system will provide a much broader range of torque/speed supplied to the motor under test, which makes a dynamometer more cost-effective and diverse than a direct drive system. The pulleys are mounted to the brake and an idler shaft, which the motor couples to. The idler shaft strictly provides a torsional load to the motor.

There are two options in load cell configurations for this system.

First option: motor load cell is included (i.e. DB6M-2.4T-FM or DB6M-2.4T-BM). In this system, the operator may exchange the motor load cell as required in order to provide the highest accuracy of measurement for a specific torque range. Accuracy plots may be viewed in Section 3: Motor Torque and Speed. The brakes also have their own load cell, which the controller for the brake uses to control the torque of the brake.

The software allows the operator to switch between reading/recording the motor torque and brake torque. In some cases, such as when a motor is placed in an environmental test chamber (the dynamometer remains outside the test chamber), it may not be possible to measure the motor torque.

Second option: motor load cell is not included (i.e. Model DB6B-2.4T-FM or DB6B-2.4T-BM). For this system, the motor torque is calculated by measuring the brake torque and multiplying by the transmission. Though belt friction, bearing friction and any other minor losses may not be accounted for in the measurements, the bearing friction is usually negligible and a properly aligned belt may have an efficiency as high as 98%. When measuring the brake torque, the air drag from the brake is not measured; however, the dynamometer software compensates for the air drag.

The motor torque, motor speed, voltage range, current range and power type(s) (i.e. DC, AC, AC-3ph) need to be specified when purchasing a dynamometer in order to select the types and limits for the measurement instruments. The following performance specifications for load cells, transducers, etc., are based on vendor specifications.

A certified calibration weight comes with each system. The zero torque and gain are adjusted by the operator as part of the calibration procedure. Calibration takes a couple of minutes and may be performed as often as desired. Customers may use calibrated weights to simulate a specific load to check for torque accuracy.

2. SPEED vs. TORQUE CURVE – FOR ONE MB-2.4 BRAKE

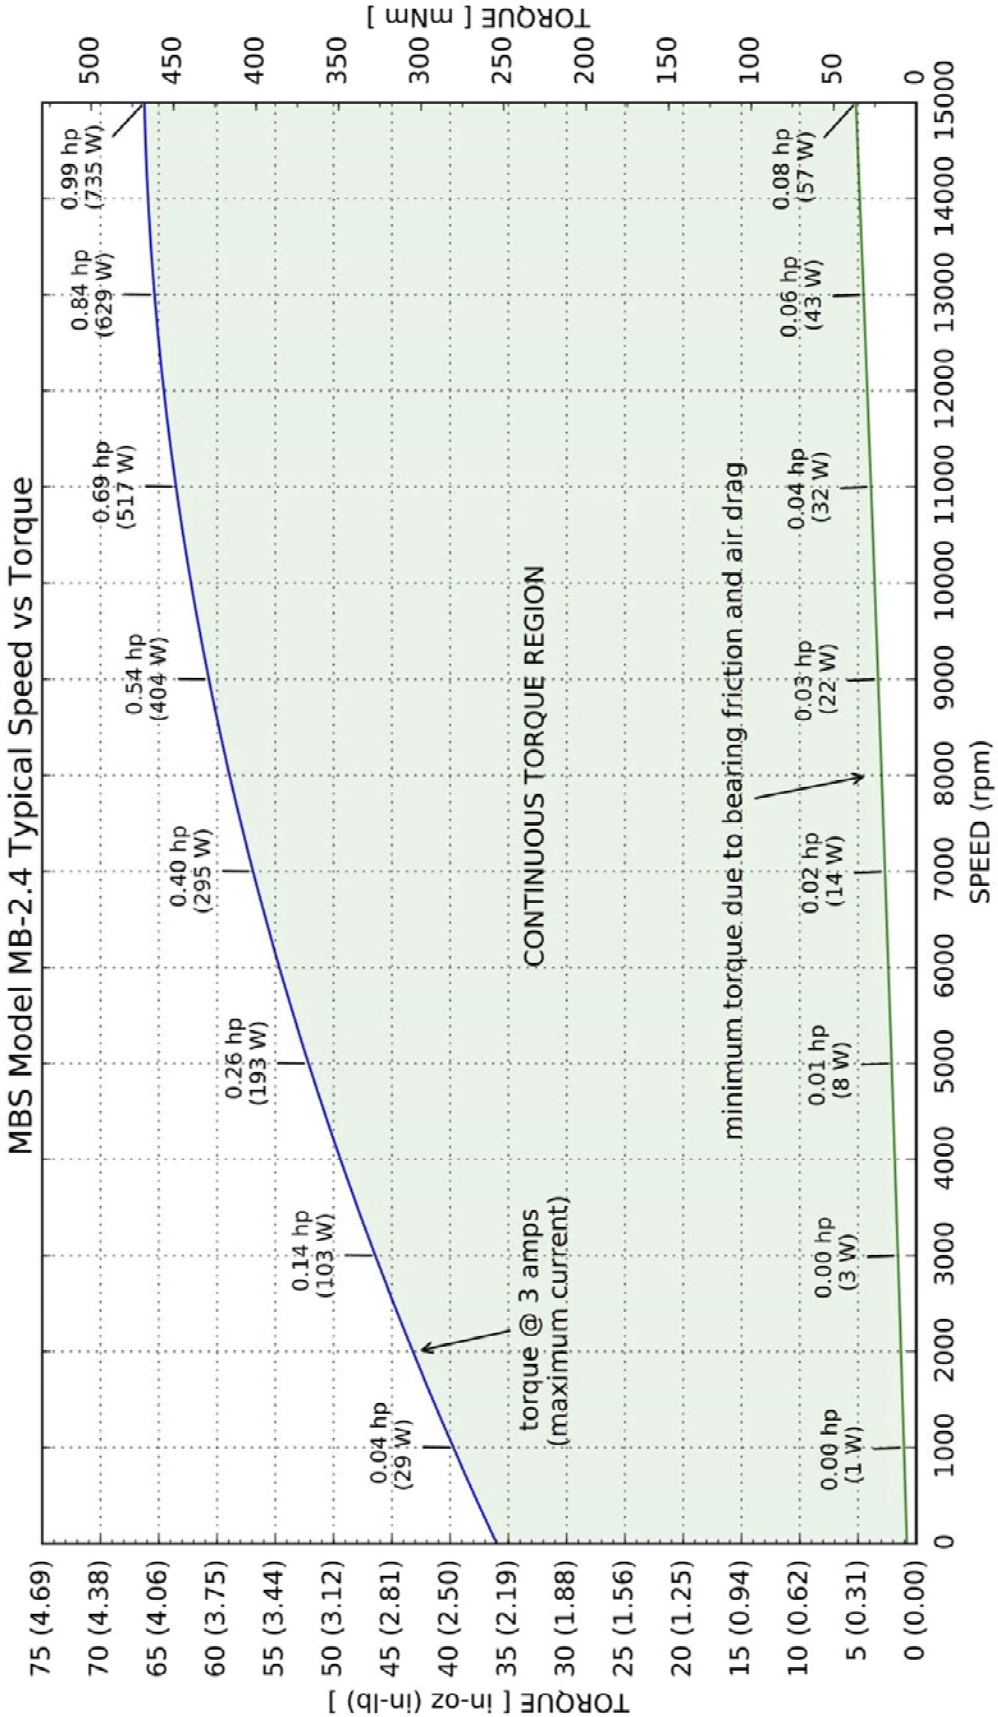

3. MOTOR TORQUE & SPEED

Systems that measure motor torque allow for three options for the load cell arm length: 2-inches, 3-inches, & 4-inches. Possible speed/torque combinations based on different pulley ratios:

3.1 Pulley Ratio's (English Units)

Motor_Spd (RPM)	Motor Torque (in-oz.)	Power (HP)	Pulley Ratio (motor/brake)	Qty. Brks	Brake Torque (in-oz.)	Brake_Spd (RPM)	Arm (in.)	L.C. Ref. #**
0	288	0	4:1	2	72	0	3	3
1,250	416	0.52	4:1	2	104	5,000	4	3
2,500	496	1.2	4:1	2	124	10,000	3	4
3,750	536	2.0	4:1	2	134	15,000	3	4

Table 1: Speed, Torque & Power (English Units) 1:4 ratio

Motor_Spd (RPM)	Motor Torque (in-oz.)	Power (HP)	Pulley Ratio (motor/brake)	Qty. Brks	Brake Torque (in-oz.)	Brake_Spd (RPM)	Arm (in.)	L.C. Ref. #**
0	72	0	1:1	2	72	0	2	1
5,000	104	0.52	1:1	2	104	5,000	3	1
10,000	124	1.2	1:1	2	124	10,000	4	1
15,000*	134	2.0	1:1	2	134	15,000	4	1

Table 2: Speed, Torque & Power (English Units) 1:1 ratio

Motor_Spd (RPM)	Motor Torque (in-oz.)	Power (HP)	Pulley Ratio (motor/brake)	Qty. Brks	Brake Torque (in-oz.)	Brake_Spd (RPM)	Arm (in.)	L.C. Ref. #**
0	18	0	1:4	2	72	0	2	1
20,000*	26	0.52	1:4	2	104	5,000	2	1
20,000*	13	0.26	1:4	1	52	5,000	2	1
20,000*	0.03	0.01	1:4	1	0.13***	5,000	2	1

Table 3: Speed, Torque & Power (English Units) 4:1 ratio

The table is based on the performance graph for the MB-2.4 Brake, shown in Section 2.
* Maximum speed is limited to the physical speed limits of the pulleys and belt.
** See Table 7 for load cell specifications based on the number shown.
*** Torque required to overcome the air drag of brake at speed; does not account for bearing friction or belt losses.

3.2 Pulley Ratio's (SI Units)

Motor_Spd (RPM)	Motor Torque (Ncm)	Power (watts)	Pulley Ratio (motor/brake)	Qty. Brks	Brake Torque (Ncm)	Brake_Spd (RPM)	Arm (cm)	L.C. Ref. #**
0	203	0	4:1	2	51	0	7.62	3
1,250	294	388	4:1	2	73	5,000	10.2	3
2,500	350	895	4:1	2	88	10,000	7.62	4
3,750	379	1,492	4:1	2	95	15,000	7.62	4

Table 4: Speed, Torque & Power (SI Units) 4:1 Pulley Ratio

Motor_Spd (RPM)	Motor Torque (Ncm)	Power (watts)	Pulley Ratio (motor/brake)	Qty. Brks	Brake Torque (Ncm)	Brake_Spd (RPM)	Arm (cm)	L.C. Ref. #**
0	51	0	1:1	2	51	0	5.08	1
5,000	73	388	1:1	2	73	5,000	7.62	1
10,000	88	895	1:1	2	88	10,000	10.2	1
15,000*	95	1,492	1:1	2	95	15,000	10.2	1

Table 5: Speed, Torque & Power (SI Units) 1:1 Pulley Ratio

Motor_Spd (RPM)	Motor Torque (Ncm)	Power (watts)	Pulley Ratio (motor/brake)	Qty. Brks	Brake Torque (Ncm)	Brake_Spd (RPM)	Arm (cm)	L.C. Ref. #**
0	13	0	1:4	2	51	0	5.08	1
20,000*	18	388	1:4	2	73	5,000	5.08	1
20,000*	9.2	194	1:4	1	37	5,000	5.08	1
20,000*	0.02	7.46	1:4	1	0.09***	5,000	5.08	1

Table 6: Speed, Torque & Power (SI Units) 1:4 Pulley Ratio

The table is based on the performance graph for the MB-2.4 Brake, shown in Section 2.
* Maximum speed is limited to the physical speed limits of the pulleys and belt.
** See Table 7 for load cell specifications based on the number shown.
*** Torque required to overcome the air drag of brake at speed; does not account for bearing friction or belt losses.

3.3 Load Cell Sizes

The load cell(s) for the system may be specified by their load rating (column 2 or 3). Sections 5.1 & 5.2 has the data for the listed load cells.

Load Cell Ref. #	Load Rating (lbs.)	Load Rating (Kg.)	Arm (inches [cm])	Max Torque (in-lbs.)	Max Torque (in-oz.)	Max Torque (Ncm)
1	2.2	1	2 [5.08]	4.4	70.5	50
1	2.2	1	3 [7.62]	6.6	106	75
1	2.2	1	4 [10.16]	8.8	141	100
2	4.4	2	2 [5.08]	8.8	141	100
2	4.4	2	3 [7.62]	13.2	212	150
2	4.4	2	4 [10.16]	17.6	282	200
3	11	5	2 [5.08]	22	353	250
3	11	5	3 [7.62]	33	529	375
3	11	5	4 [10.16]	44	706	500
4	13	6	2 [5.08]	26.5	423	300
4	13	6	3 [7.62]	39.7	635	450
4	13	6	4 [10.16]	52.9	847	600

Table 7: Load Cell Reference

The following sections, 4 & 5, are the specifications for the different types of load cells.

4. LOAD CELLS (DB6B-2.4T-FM, Measuring Brake Torque)

Load Cell Load Rating.....70.5 oz. (2 kg)
Arm Length .....1.75 inches (4.445 cm)
Rated torque of Load Cell .....123.4 in-oz. (87.2 Ncm)
Safe Overload torque of Load Cell .....185.2 in-oz. (130.8 Ncm)
Max Brake Torque.....67 in-oz. (47.3 Ncm)
Max Torque to Load Cell .....67 in-oz. (47.3 Ncm)
Non-Linearity.....0.02% of Rated Output (R.O.)
Hysteresis…….. .....0.02% of R.O.
Non-Repeatability…….. .....0.02% of R.O.
Zero Balance.....±5% of R.O.
Compensated Temperature Range .....14℉ to 104℉
Safe Temperature Range…… .....14℉ to 140℉
Temperature Effect on Output……. .....0.002% of Load/℉
Temperature Effect on Zero……. .....0.002% of Load/℉
Safe Overload .....150% of R.O.*

* Hard stops are in place to help prevent damage from over-load.

4.1 Brake Load Cell Accuracy Plot (in-oz.) – Linear

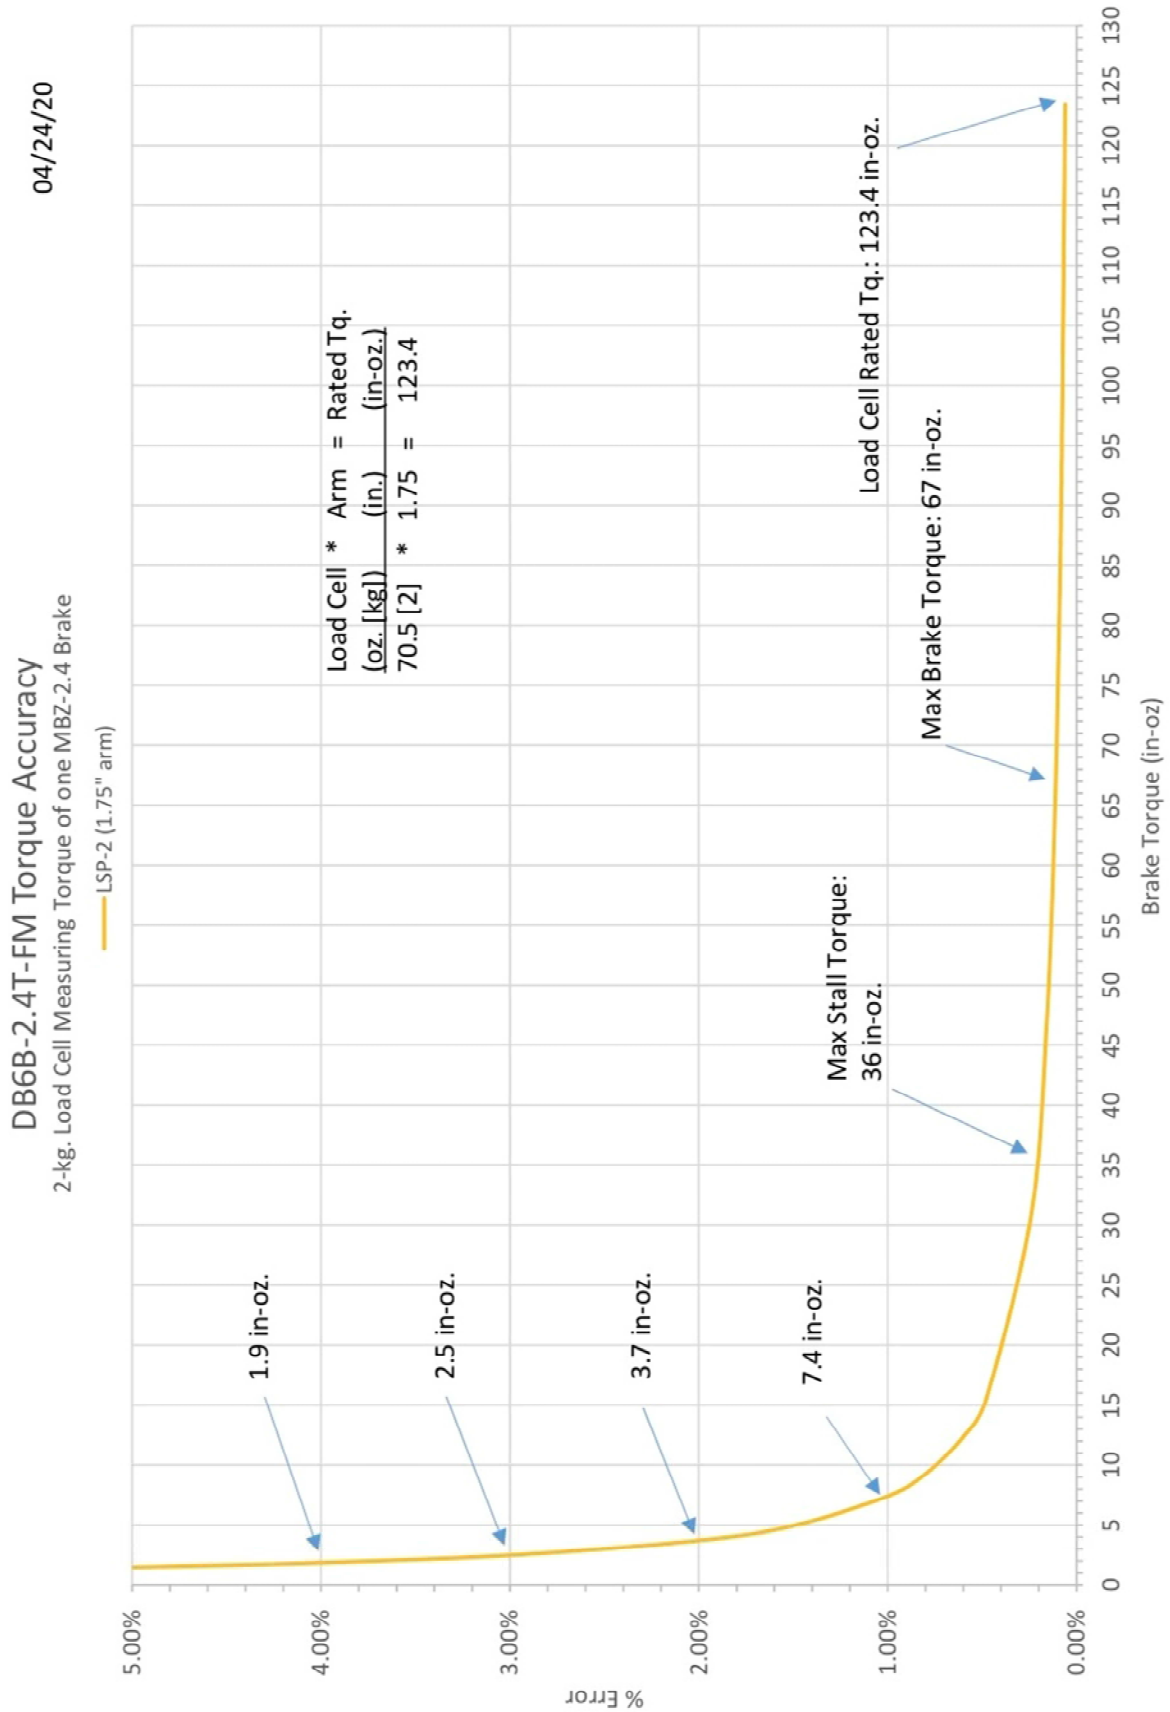

4.2 Brake Load Cell Accuracy Plot (N-cm) – Linear

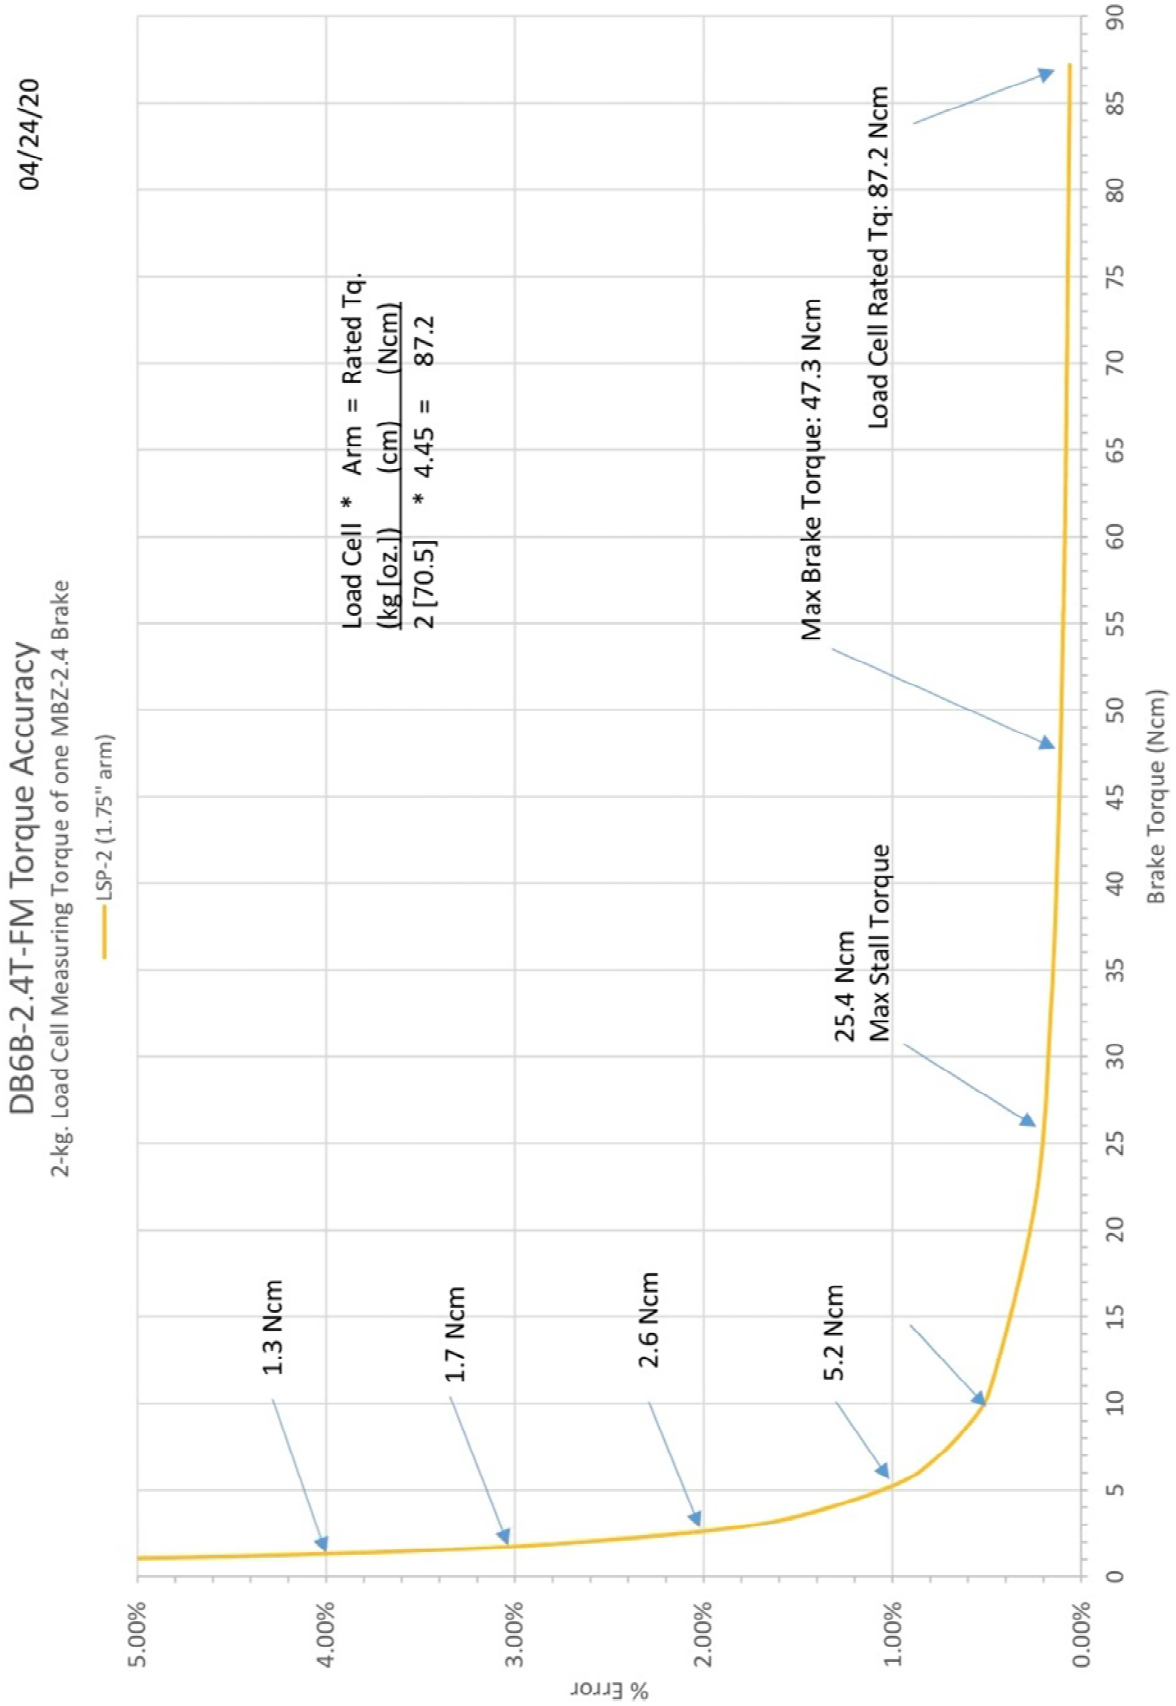

5. LOAD CELLS (DB6M-2.4T-FM, Measuring Motor Torque):

For section 5.1 & 5.2, reference Table 7, in section 3.3 Load Cell Sizes.

5.1 Load Cell #'s 1 through 3.

Load Cell Load Rating	35.3 oz. (1 kg)
Safe Overload	150% of R.O.*
Non-Linearity	0.02% of Rated Output (R.O.)
Hysteresis	0.02% of R.O.
Non-Repeatability	0.02% of R.O.
Zero Balance	±5% of R.O.
Compensated Temperature Range	14℉ to 104℉
Safe Temperature Range	14℉ to 140℉
Temperature Effect on Output	0.002% of Load/℉
Temperature Effect on Zero	0.002% of Load/℉

5.2 Load Cell #4.

Load Cell Load Rating	212 oz. (6 kg)
Safe Overload	150% of R.O.*
Non-Linearity	0.02% of Rated Output (R.O.)
Hysteresis	0.02% of R.O.
Non-Repeatability	0.02% of R.O.
Zero Balance	±1% mV/V
Compensated Temperature Range	14℉ to 104℉
Safe Temperature Range	14℉ to 140℉
Temperature Effect on Output	0.002% of Load/℉
Temperature Effect on Zero	0.002% of Load/℉

* Hard stops are in place to help prevent damage from over-load.

The Torque Accuracy plots to follow show the percentage error as a function of measured torque. These plots show the range that the load cell selected will accurately measure. Plots are shown on a linear scale and, for clarity, on a logarithmic scale. The maximum torque to the motor is based on the pulley ratio selected for belt coupled systems. The accuracy plots are based on published data from the load cell vendor.

5.3 Motor Load Cell Accuracy Plot (in-oz., 3 & 4-inch arm) - Linear

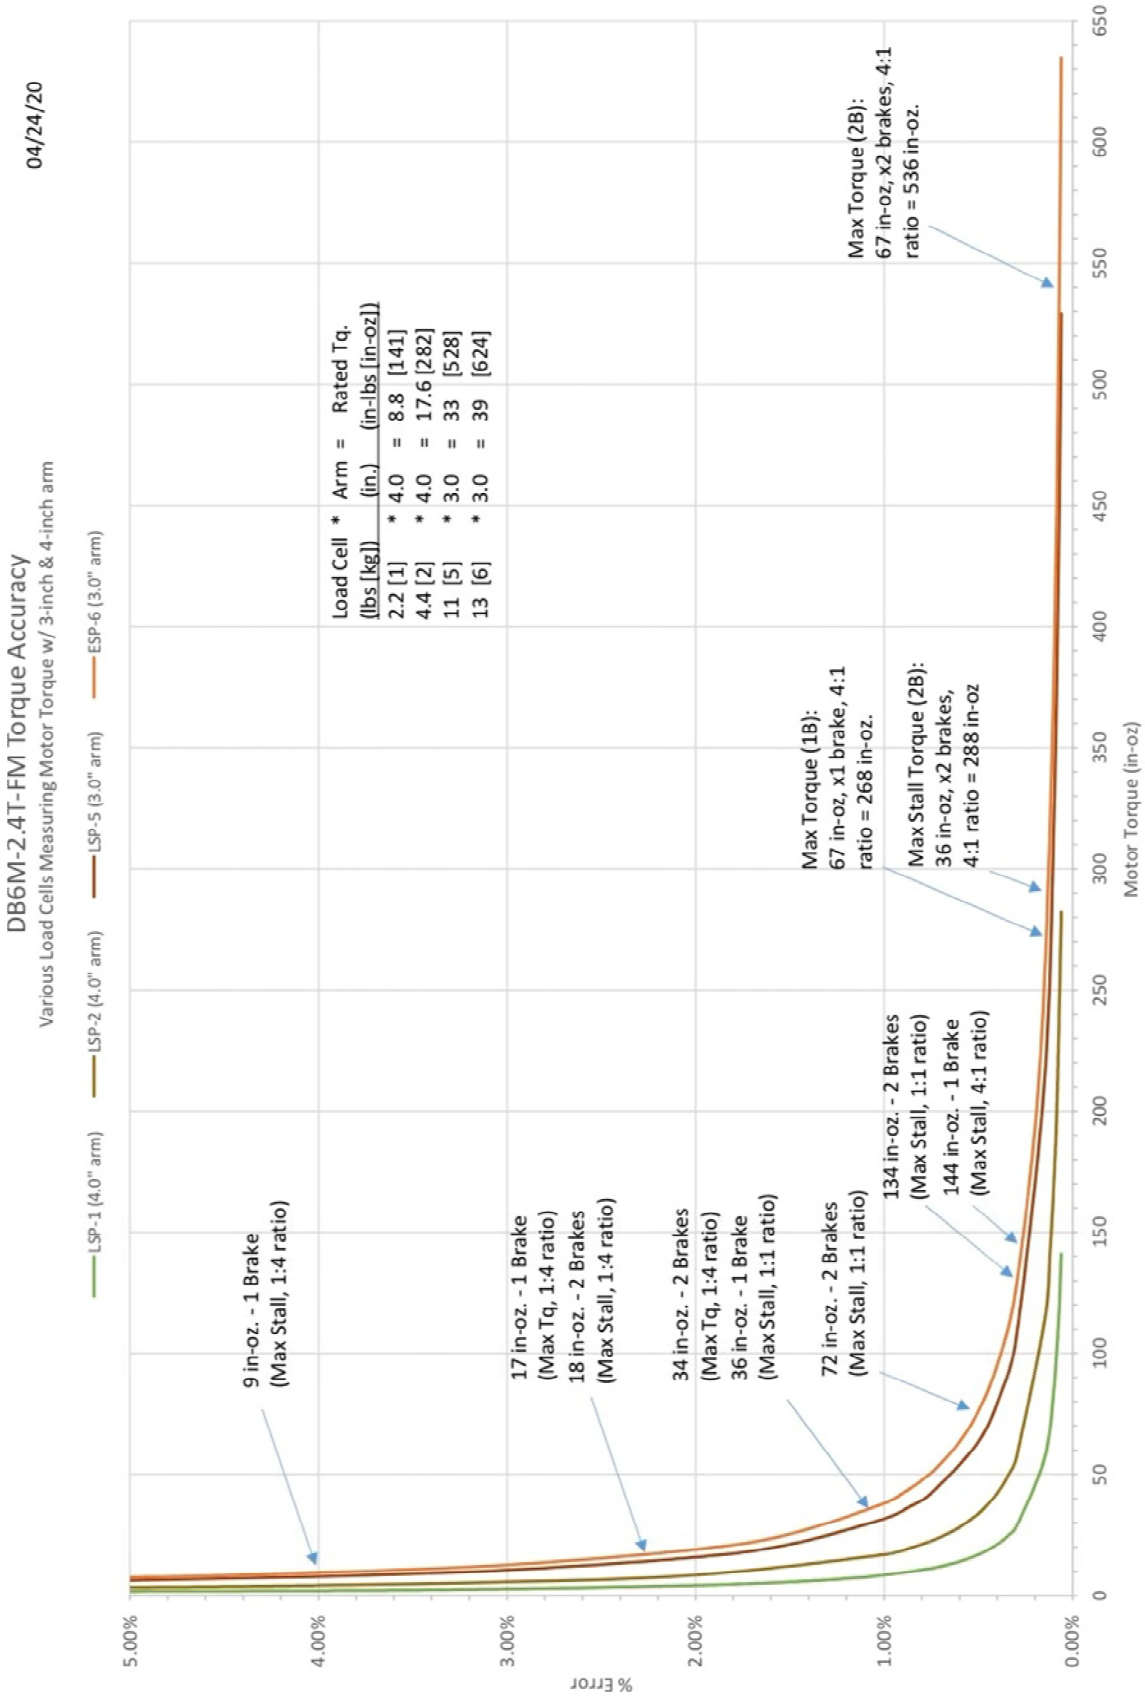

5.4 Motor Load Cell Accuracy Plot (in-oz., 3 & 4-inch arm) – Logarithmic

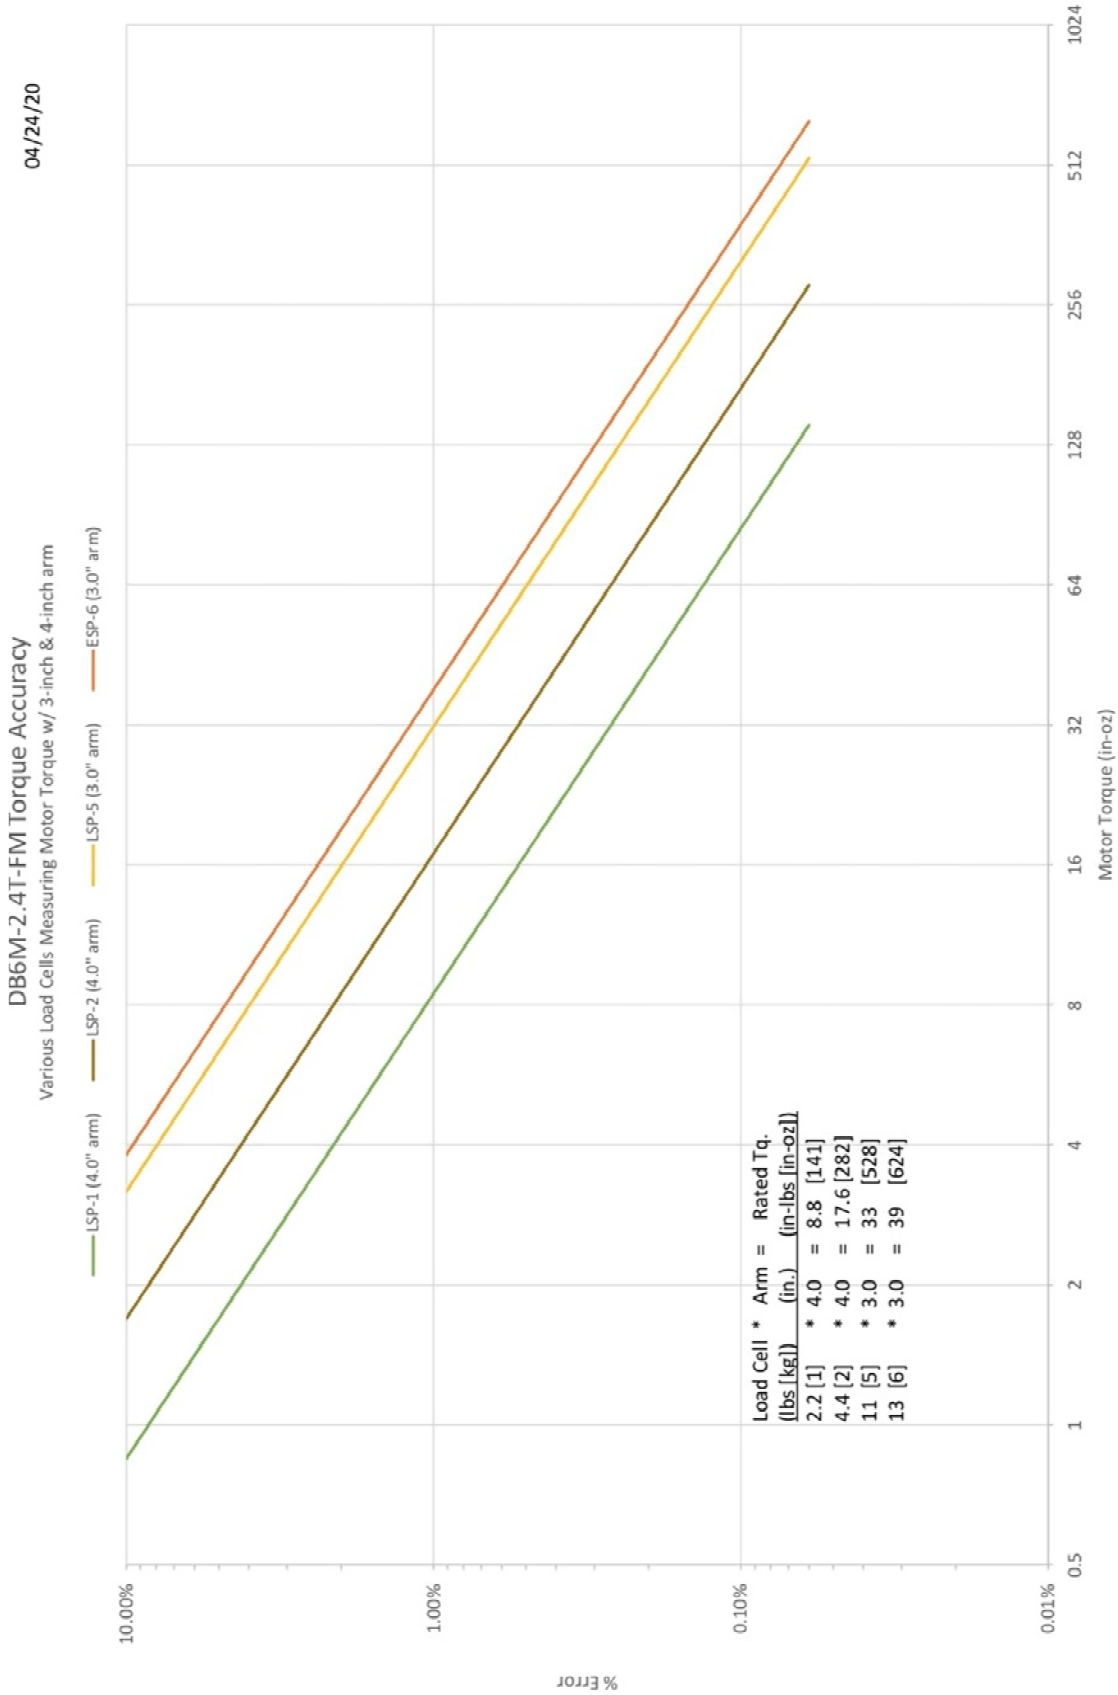

5.5 Motor Load Cell Accuracy Plot (N-cm, 7.62 & 10.16-cm arm) – Linear

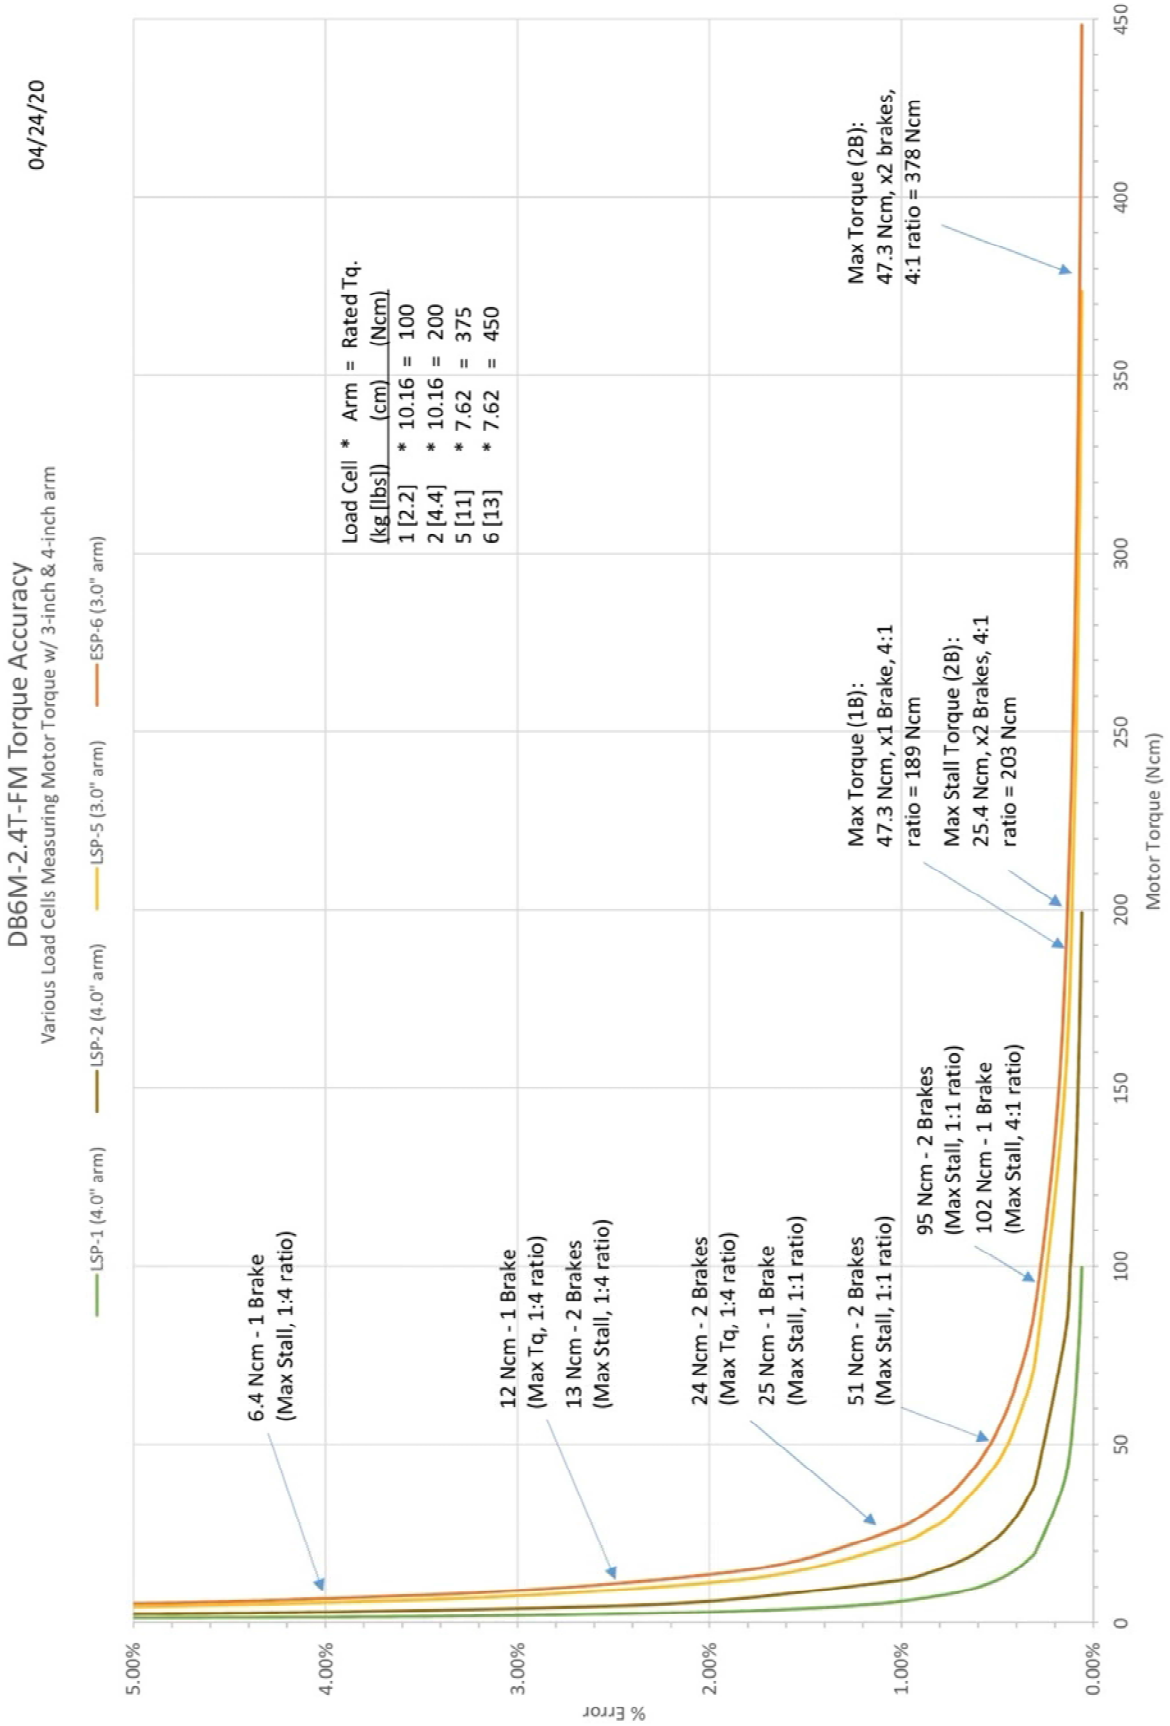

5.6 Motor Load Cell Accuracy Plot (N-cm, 7.62 & 10.16-cm arm) – Logarithmic

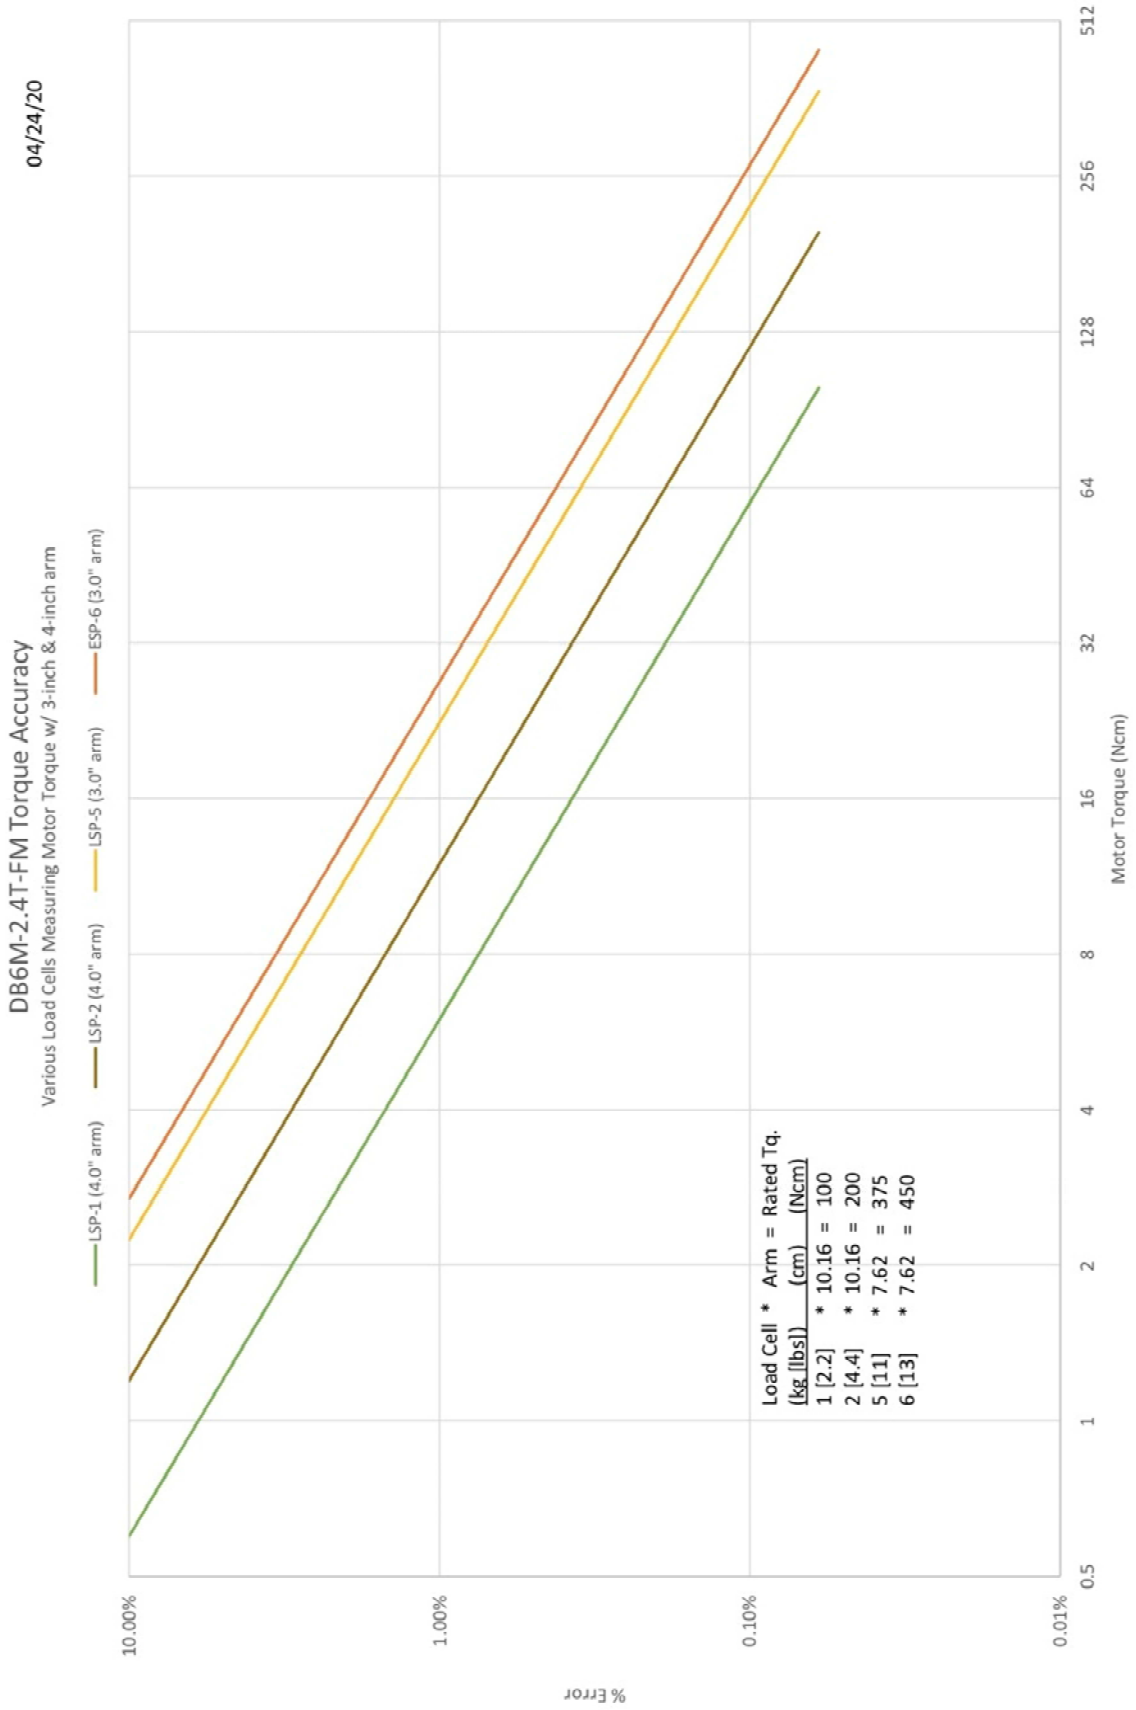

5.7 Motor Load Cell Accuracy Plot (in-oz., 2-inch arm) – Linear

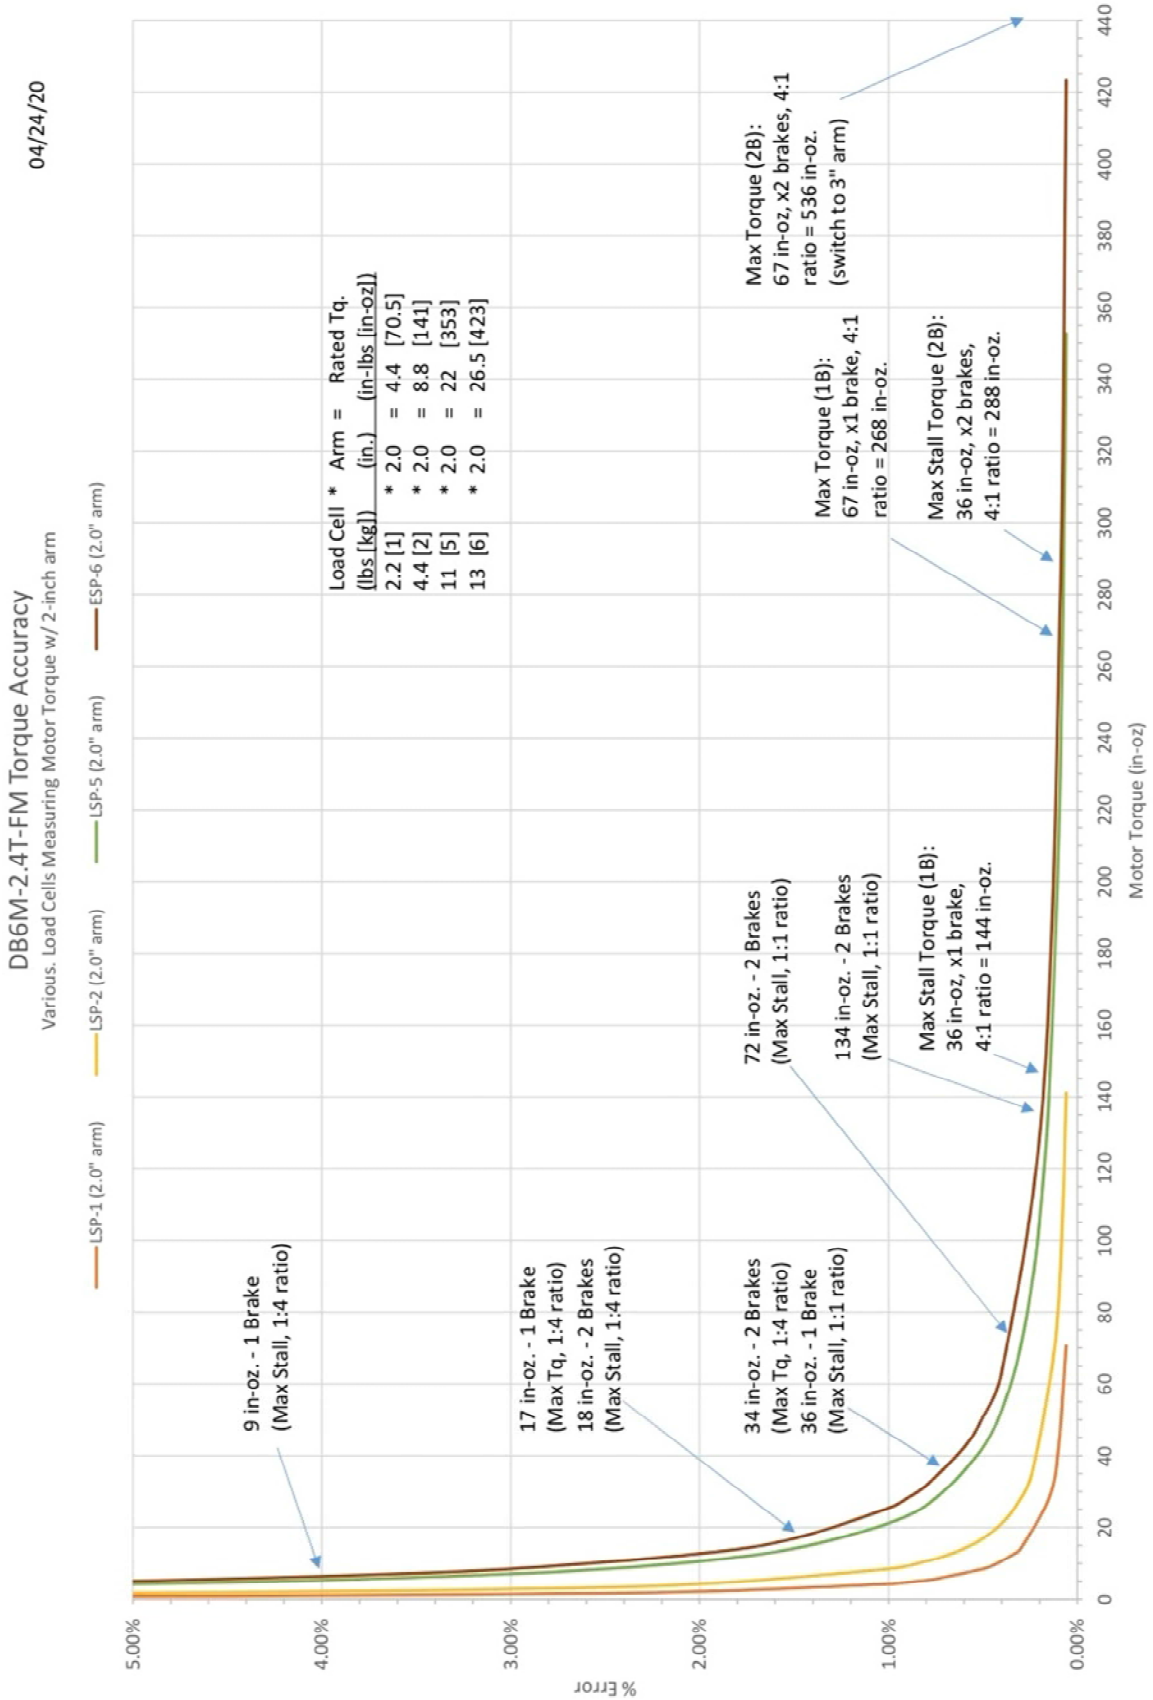

5.8 Motor Load Cell Accuracy Plot (in-oz., 2-inch arm) – Logarithmic

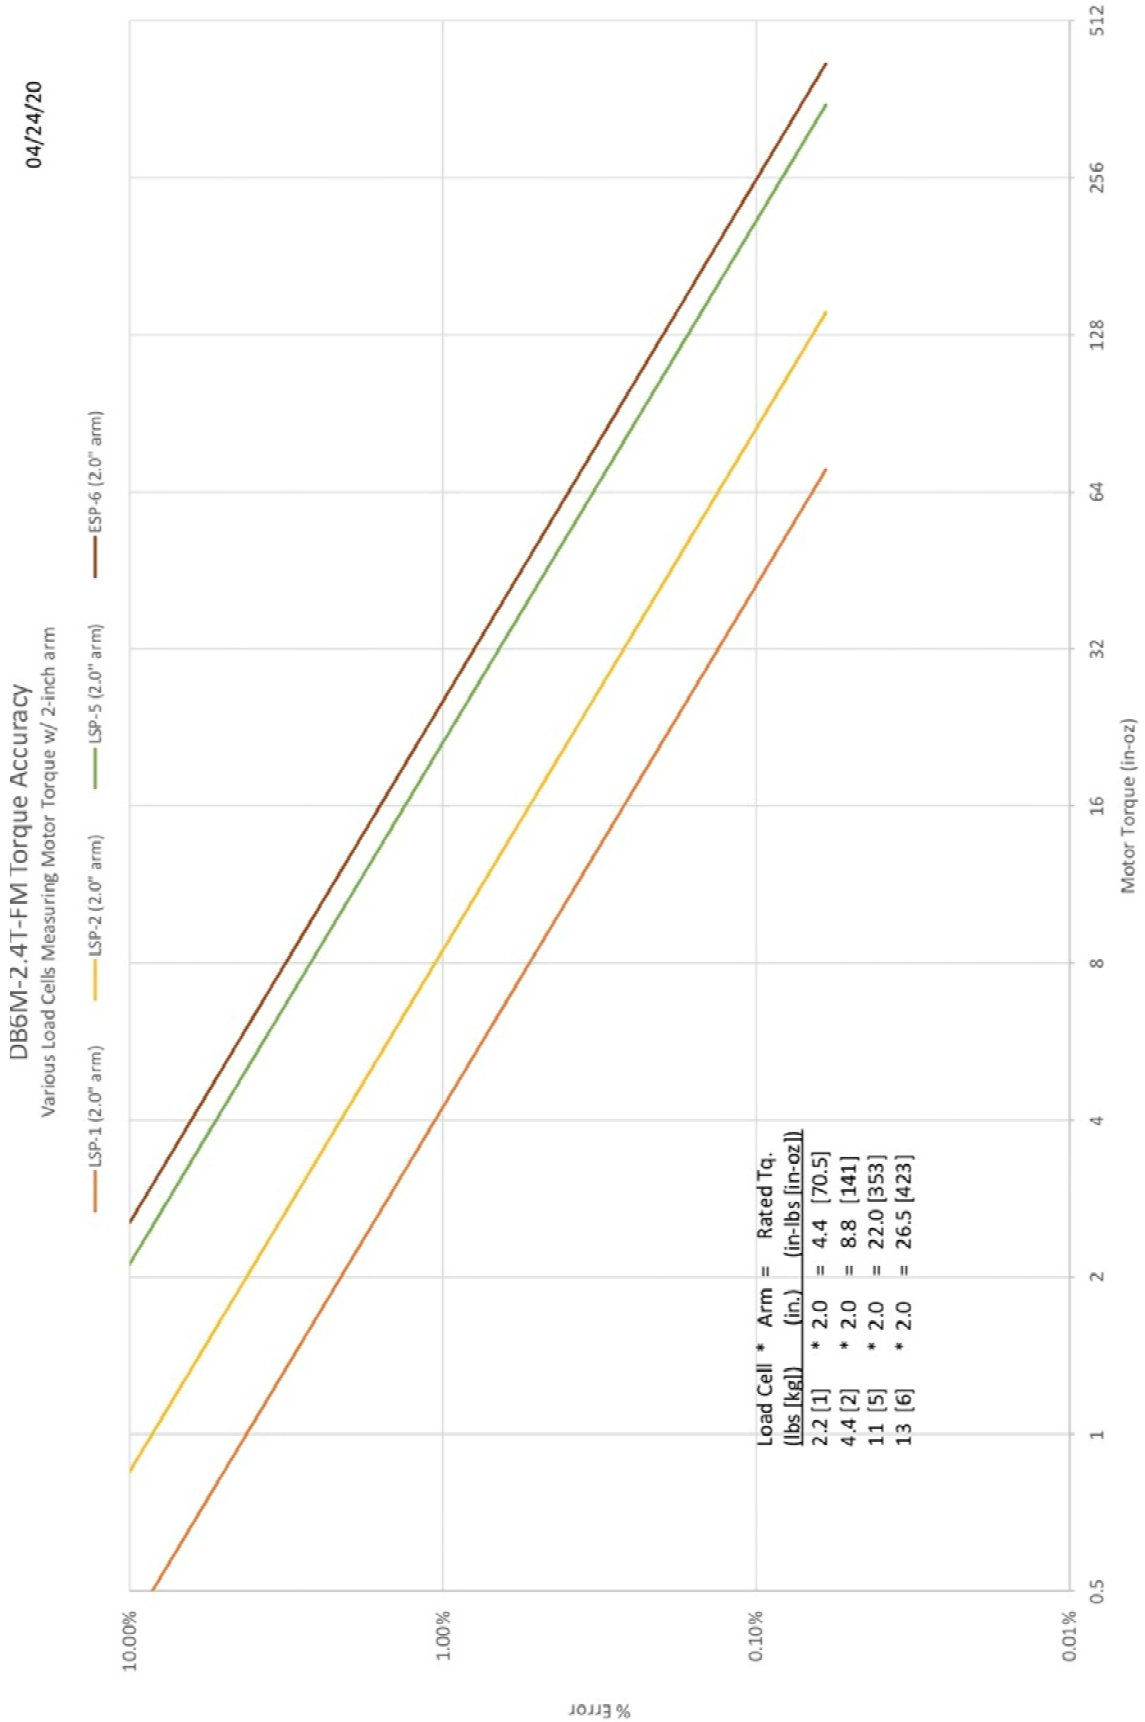

5.9 Motor Load Cell Accuracy Plot (N-cm, 5.08-cm arm) – Linear

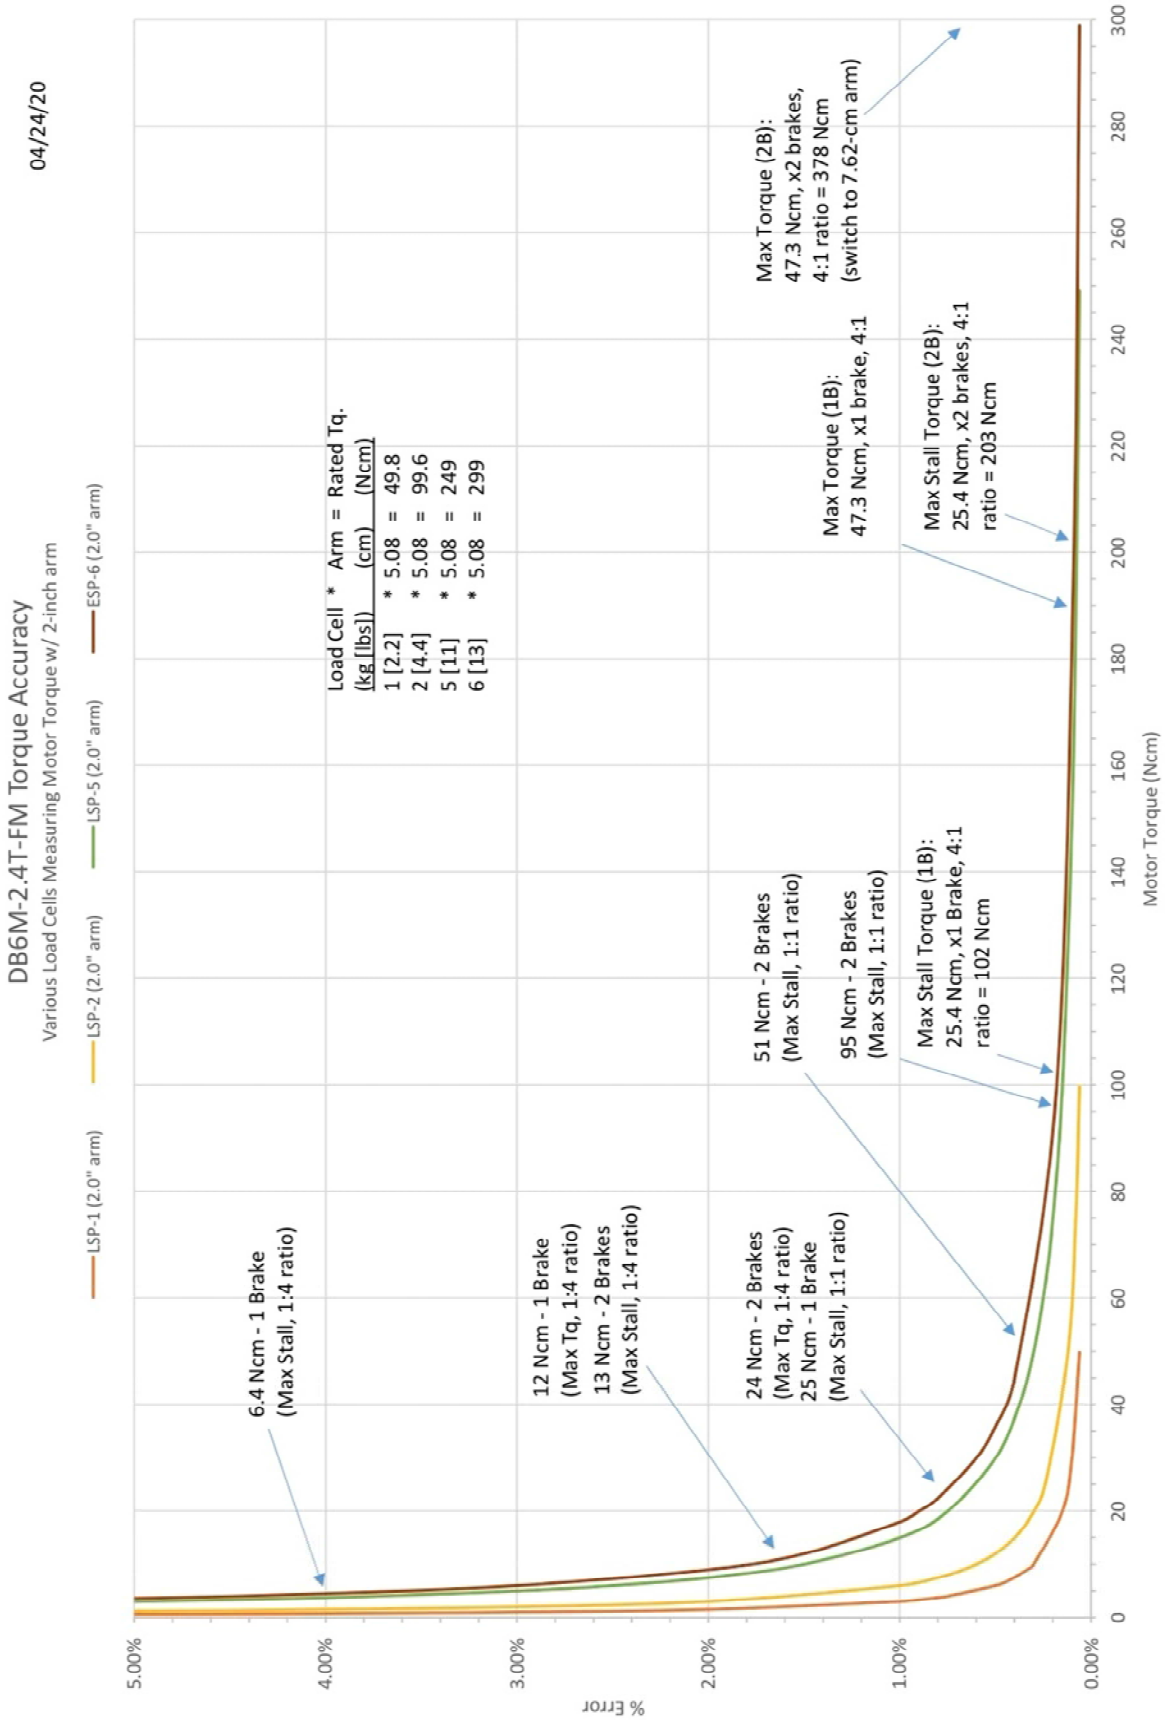

5.10 Motor Load Cell Accuracy Plot (N-cm, 5.08-cm arm) - Logarithmic

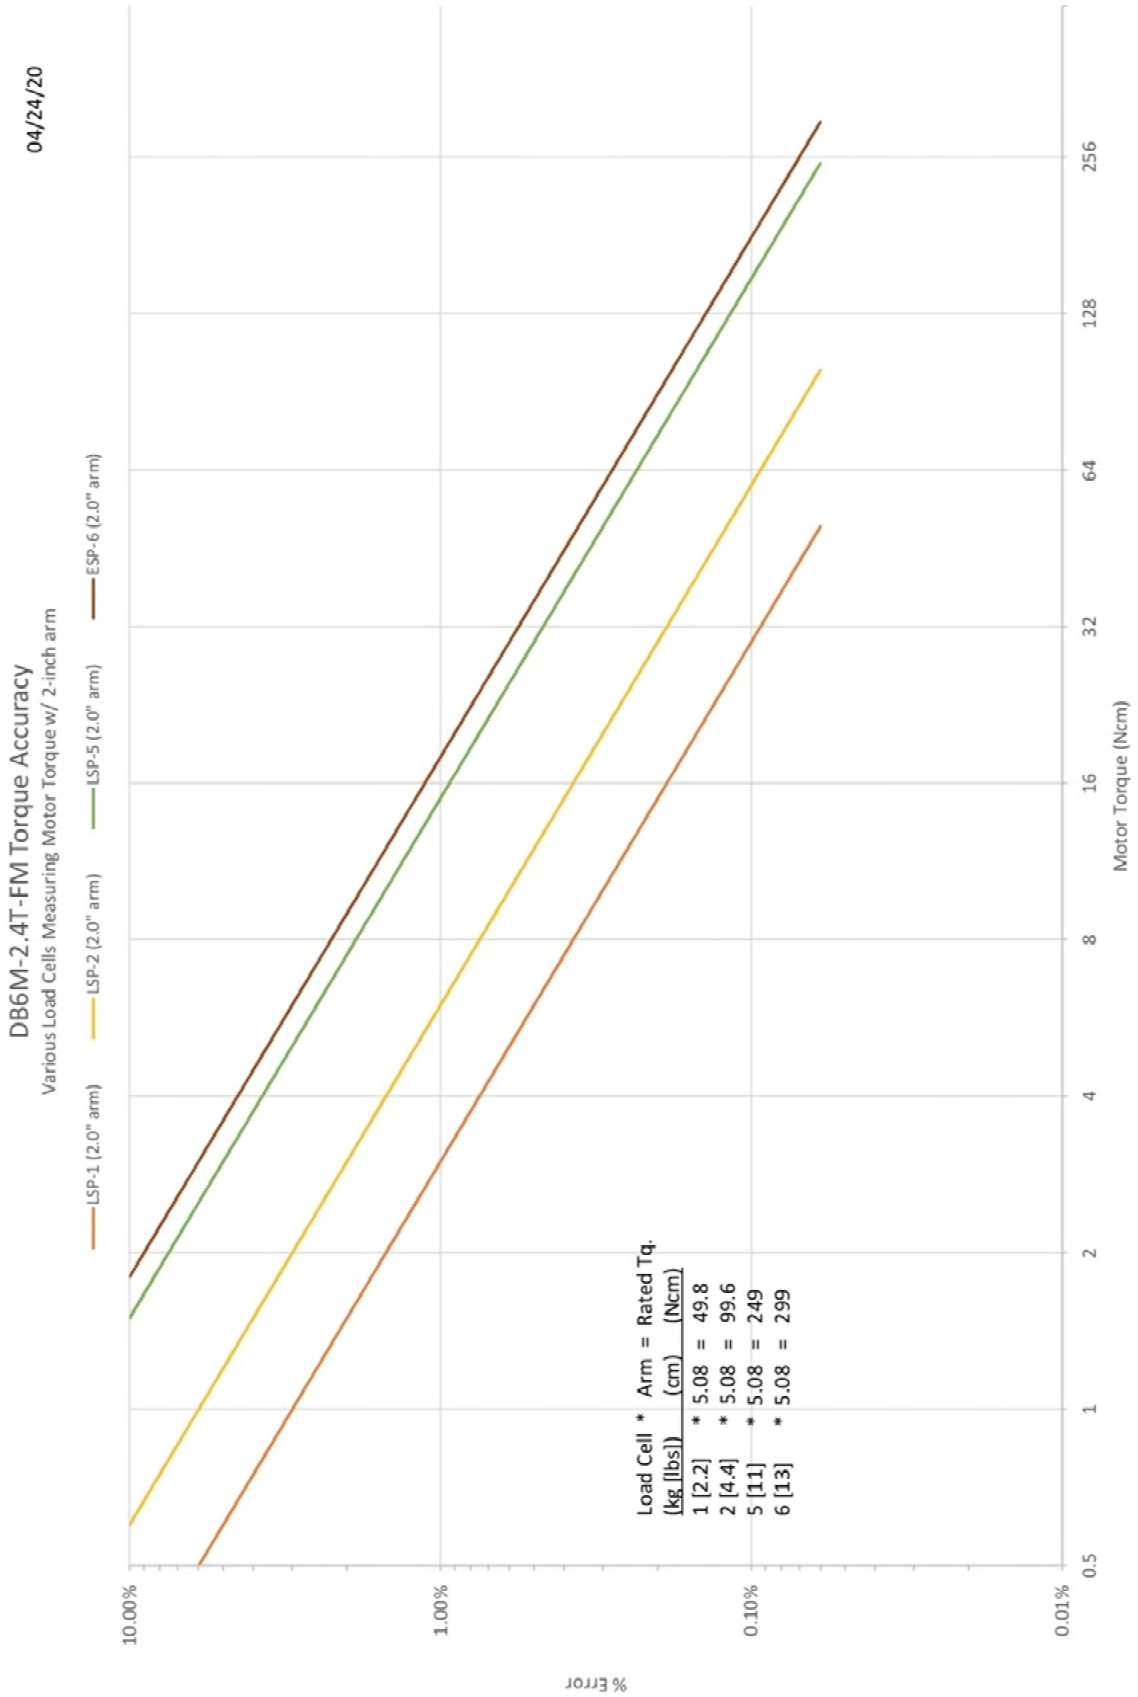

6. SPEED MEASUREMENT

A standard brake has five magnets (alternative quantity or an external encoder is optional) which trigger a hall effect sensor. The speed is averaged over one revolution of the brake. A 48-MHZ clock is used to measure the time between magnets (or pulses).

Parameter	Conditions	Min.	Typ.	Max.	Units
Clock Error	~25℃		±30		PPM
	-10℃ to 60℃		±50		PPM
	-40℃ to 85℃		±100		PPM
Brake Speed	5 magnets	12		180,000*	RPM
	30 magnets	2		30,000*	RPM
	1,000 PPR	0.066		5,000	RPM
	2,000 PPR	0.033		2,000	RPM

* Theoretical speed; actual maximum speed is limited to the speed of the brake.

7. DATA SAMPLING

Sampling is the frequency of measuring and recording data; this rate is adjustable by the operator.

Parameter	Conditions	Min.	Typ.	Max.	Units
Sampling Rate	2.3 GHz Proc.	20	50	-	ms

i.e., 50 ms = 20 samples (or readings) per second.

8. LAPTOP COMPUTER

Parameter	Conditions	Min.	Typ.	Max.	Units
Processor		2.3		GHz	
Memory		8		GB	
Display	LED LCD		15.6		inches

A computer with a more powerful processor may allow a higher sampling frequency.

9. POWER REQUIREMENTS

The MBS Dynamometer requires two 115 or 230 VAC power outlets: one for the laptop computer and one for the controller. The brakes in the dynamometer structure receive power from the controller. The AC power supplies the power supplies and cooling fan in the controller; everything else is 24 VDC (or less) in the system.

Item	Voltage	Type	Current (amps)	Freq. (Hz)	# Plugs
Controller	115/230	VAC	1.1/0.6	50/60	1
Laptop	110-240	VAC	1.2	50/60	1
Dynamometer	24	VDC	6.0	-	none

10. DC VOLTAGE TRANSDUCERS

10.1 Input

Range..... 0 VDC to: 1, 5, 10, 50, 150, 200 up to 600 VDC
Overload..... 2x voltage range selected
Frequency Range ..... DC only

The range represents transducers that measure from 0-1 VDC, 0-5 VDC, 0-10 VDC, etc.

10.2 Output

Basic Accuracy 1.0%
Linearity..... 10% to 100% F.S.
Thermal Drift..... 500 PPM/℃
Response Time ..... 250 ms

10.3 Environmental and Physical Characteristics

Operating Temperature ..... 0℃ to +50℃
Insulation Category..... CAT II
Vibration Tested to..... IEC 60068-2-6, 1995
Pollution Degree 2
Altitude ..... 2000-meter max.
Insulation Voltage ..... 2500 VDC
MTBF..... Greater than 100K hours
Relative Humidity..... 5% to 95%, non-condensing
Weight ..... 0.5 lbs.

11. AC VOLTAGE TRANSDUCERS – SINGLE PHASE

11.1 Input

Range..... 0 VAC to: 50, 150, 250, 500, 600 VAC
Overload..... 2x voltage range selected
Frequency Range ..... 20 Hz to 5 kHz

11.2 Output

Basic Accuracy 0.5%
Linearity..... 10% to 100% F.S.
Calibration ..... True RMS sensing
Thermal Drift..... 500 PPM/℃
Response Time ..... 250 ms

11.3 Environmental and Physical Characteristics

Operating Temperature ..... 0℃ to +60℃
Insulation Category..... CAT II
Vibration Tested to..... IEC 60068-2-6, 1995
Pollution Degree 2
Altitude ..... 2000-meter max.
Insulation Voltage ..... 2500 VDC
MTBF..... Greater than 100K hours
Relative Humidity..... 5% to 95%, non-condensing
Weight ..... 0.5 lbs.

12. DC CURRENT TRANSDUCERS (Split Core)

12.1 Input

Range..... 0 ADC to: 2, 5, 10, 20, 30, 50 up to 600 ADC
Overload ..... 4x current range selected
Frequency Range ..... DC only

12.2 Output

Basic Accuracy 1.0%
Linearity..... 10% to 100% F.S.
Thermal Drift..... 500 PPM/℃
Response Time ..... 250 ms

12.3 Environmental and Physical Characteristics

Operating Temperature ..... 0℃ to +50℃
Insulation Category..... CAT II
Vibration Tested to..... IEC 60068-2-6, 1995
Pollution Degree 2
Altitude ..... 2000-meter max.
Insulation Voltage ..... 2500 VDC
MTBF..... Greater than 100K hours
Relative Humidity..... 5% to 95%, non-condensing
Weight ..... 0.5 lbs.

13. AC CURRENT TRANSDUCERS – SINGLE PHASE (Split Core)

13.1 Input

Range ..... 0 AAC to: 5, 10, 15, 20, 25, 30, 40, 50 up to 600 AAC
Overload..... 4x current range selected
Frequency Range ..... 20 Hz to 5 kHz

13.2 Output

Basic Accuracy 0.5%
Linearity..... 10% to 100% F.S.
Calibration ..... True RMS sensing
Thermal Drift..... 500 PPM/℃
Response Time ..... 250 ms

13.3 Environmental and Physical Characteristics

Operating Temperature ..... 0℃ to +60℃
Insulation Category..... CAT II
Vibration Tested to..... IEC 60068-2-6, 1995
Pollution Degree 2
Altitude ..... 2000-meter max.
Insulation Voltage ..... 2500 VDC
MTBF..... Greater than 100K hours
Relative Humidity..... 5% to 95%, non-condensing
Weight ..... 0.5 lbs.

14. DYNAMOMETER LAYOUT – DB6B-2.4T-FM, LOAD CELL ON BRAKE

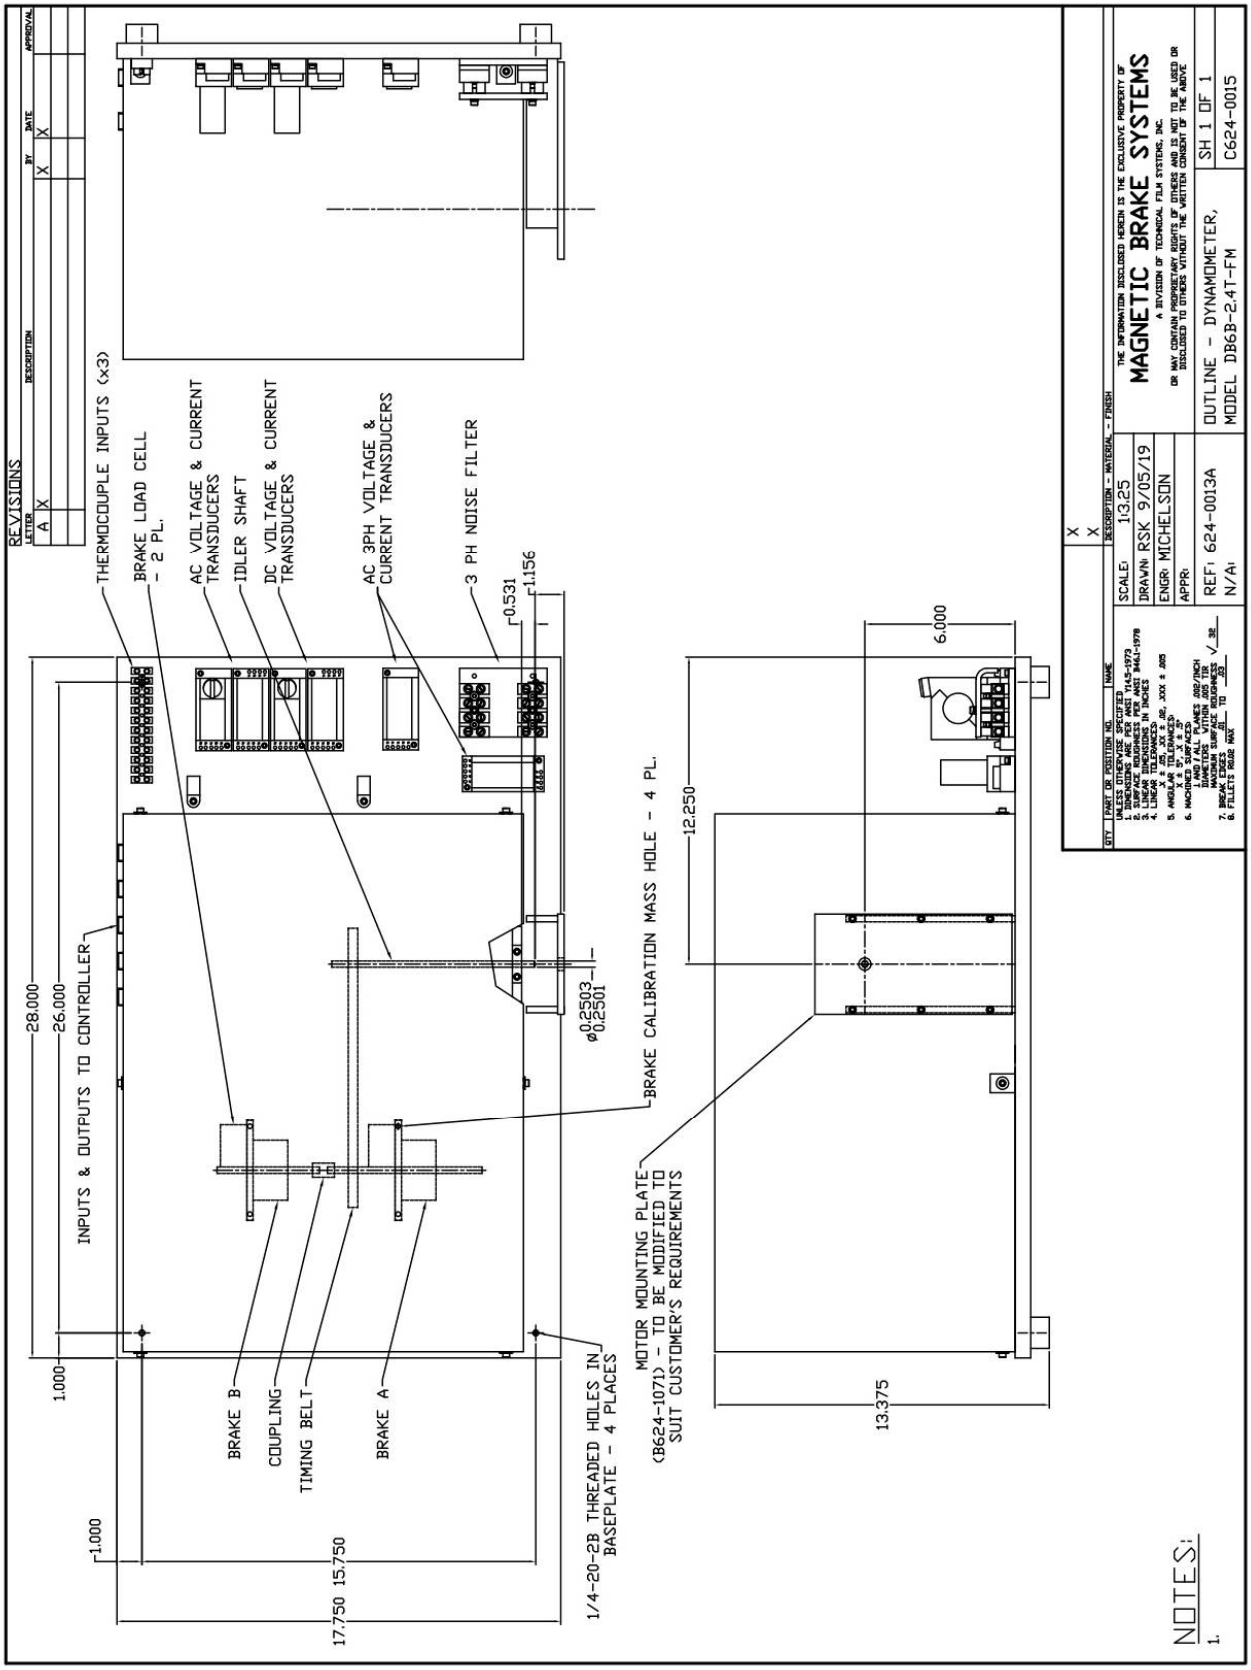

15. MOTOR MOUNTING PLATE – FACE MOUNT (DB6B)

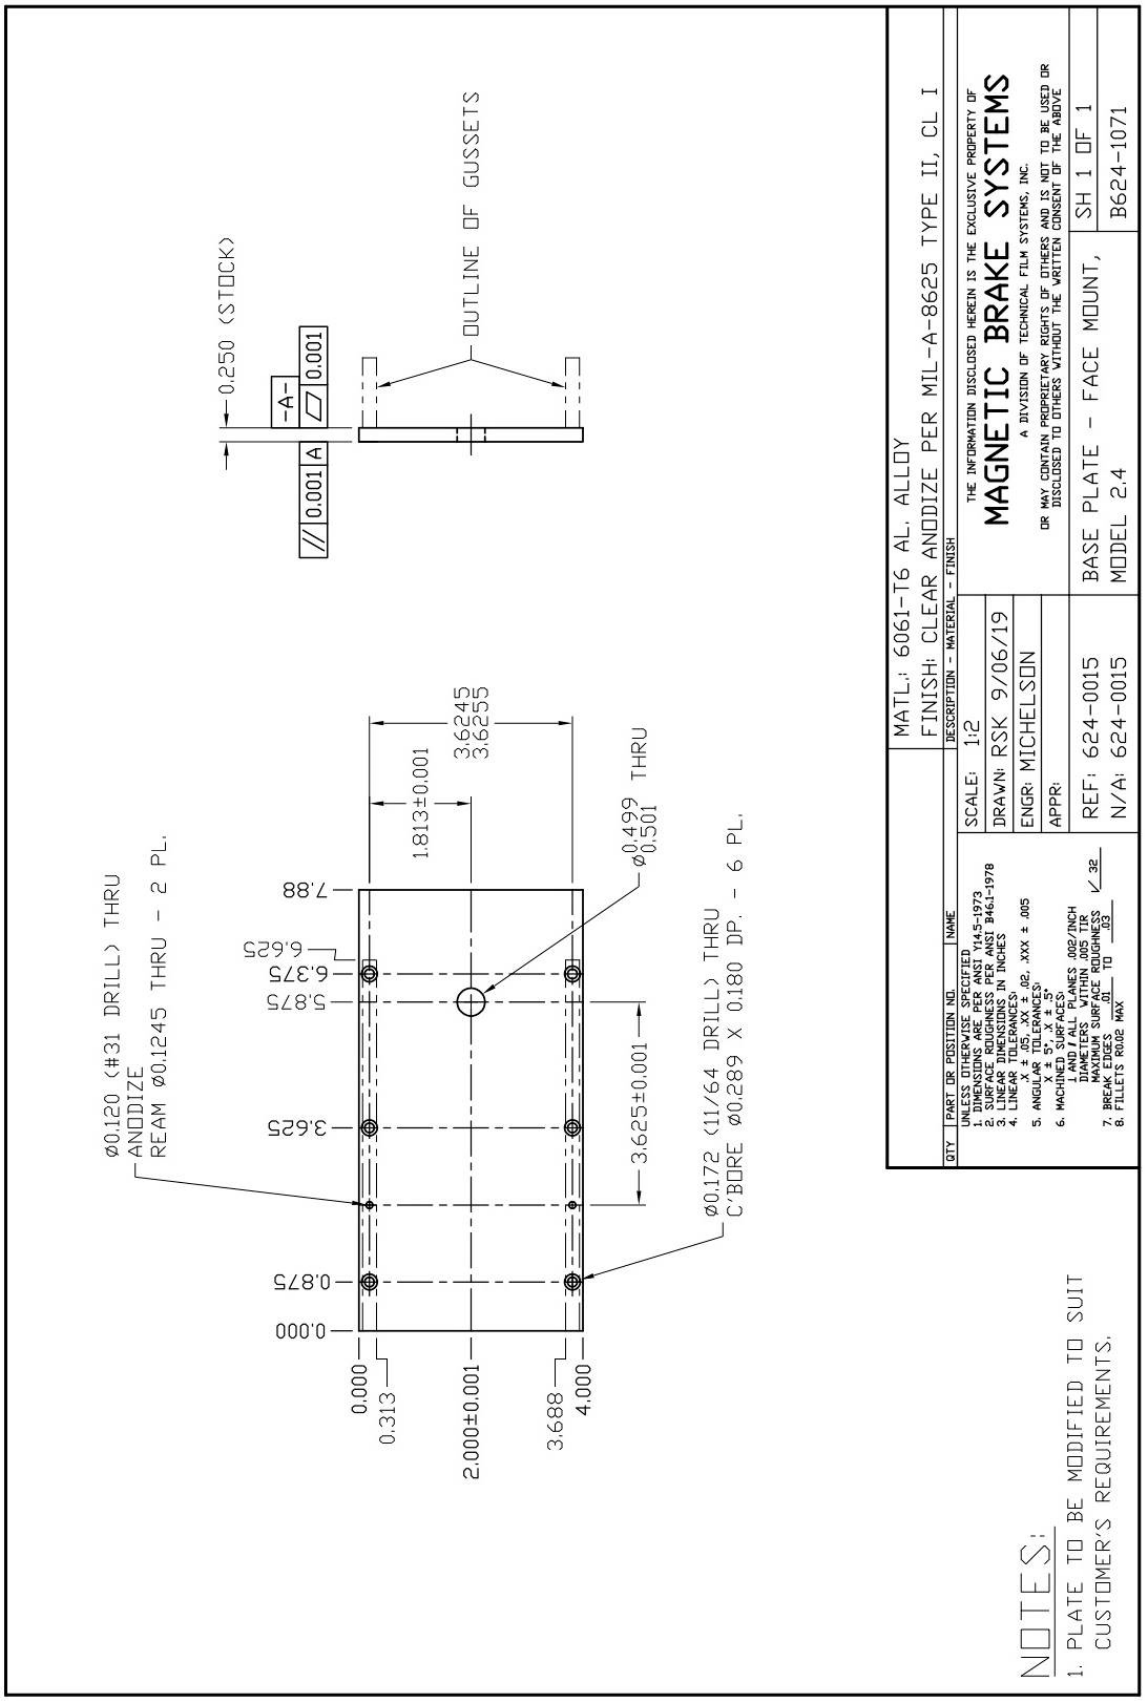

16. DYNAMOMETER LAYOUT – DB6M-2.4T-FM, L.C. ON MOTOR (OPTION 1)

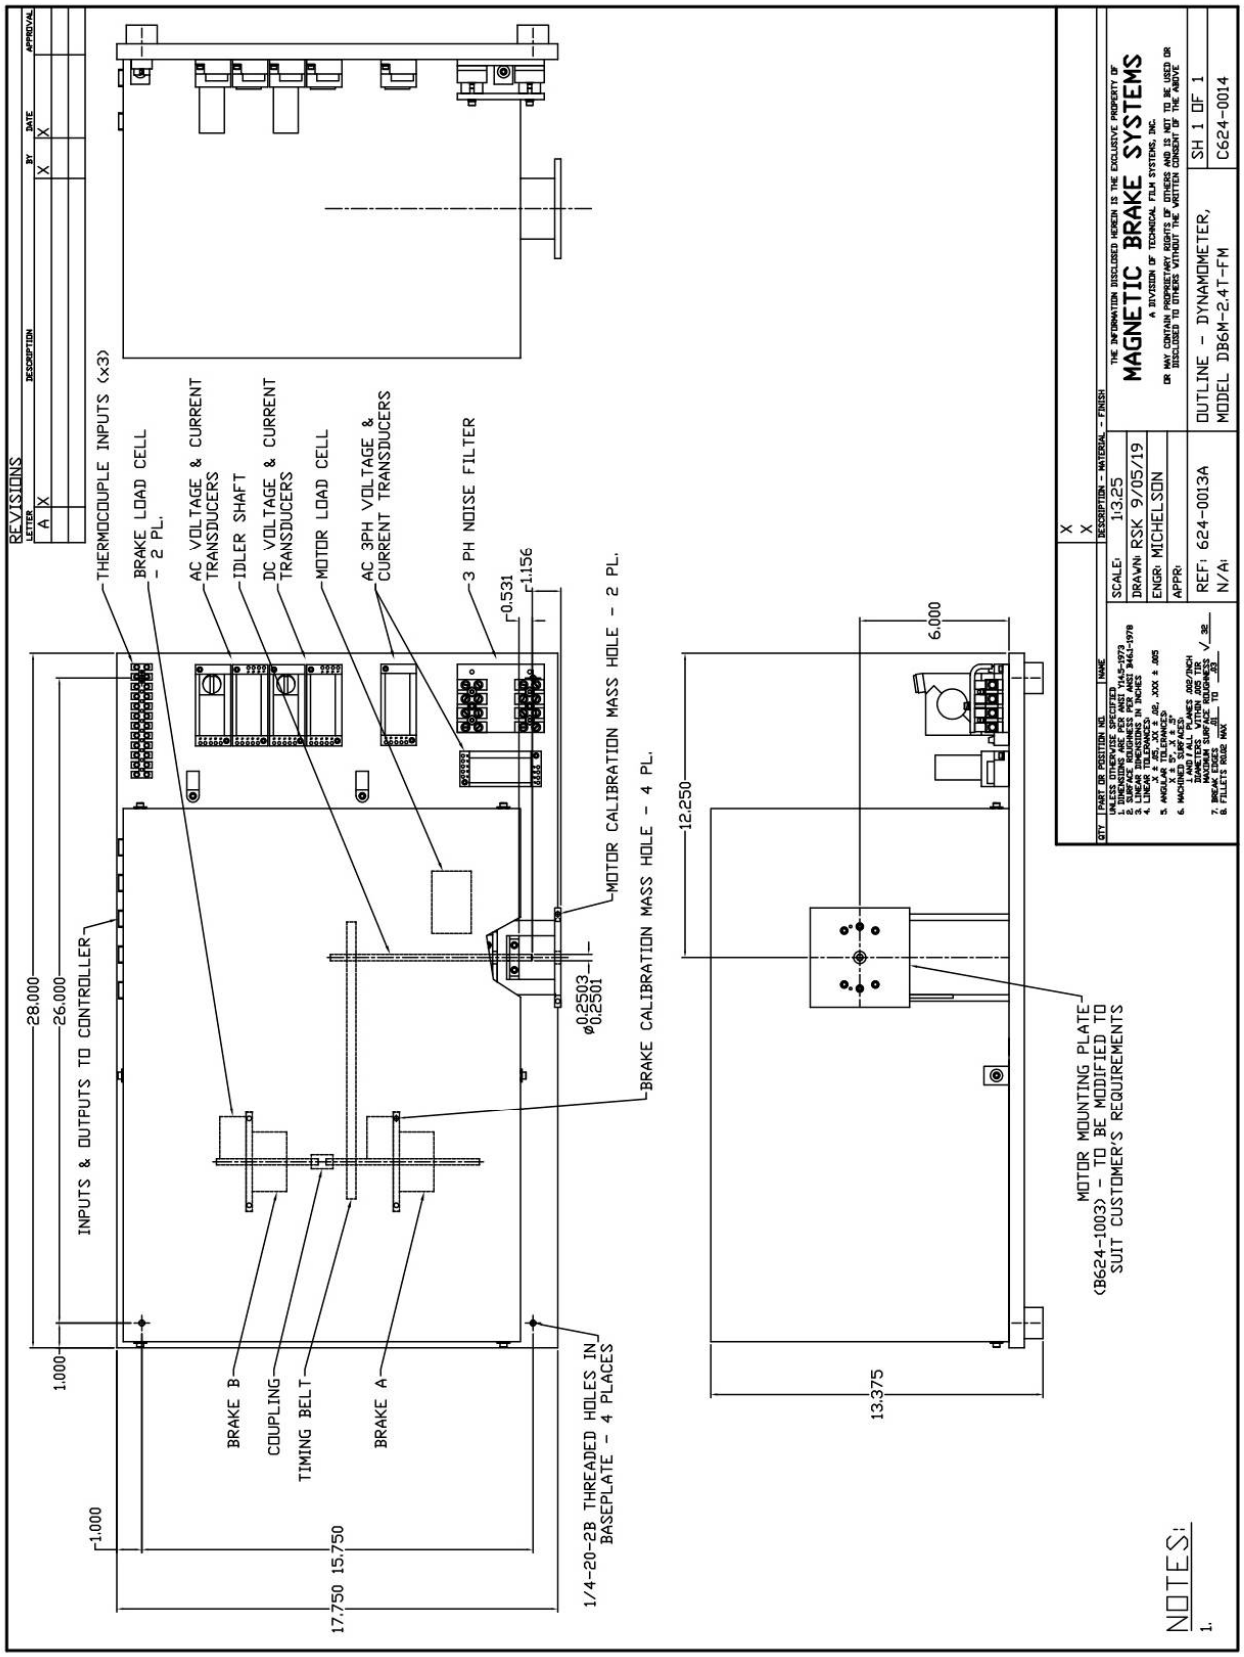

17. MOTOR MOUNTING PLATE – FACE MOUNT (DB6M)

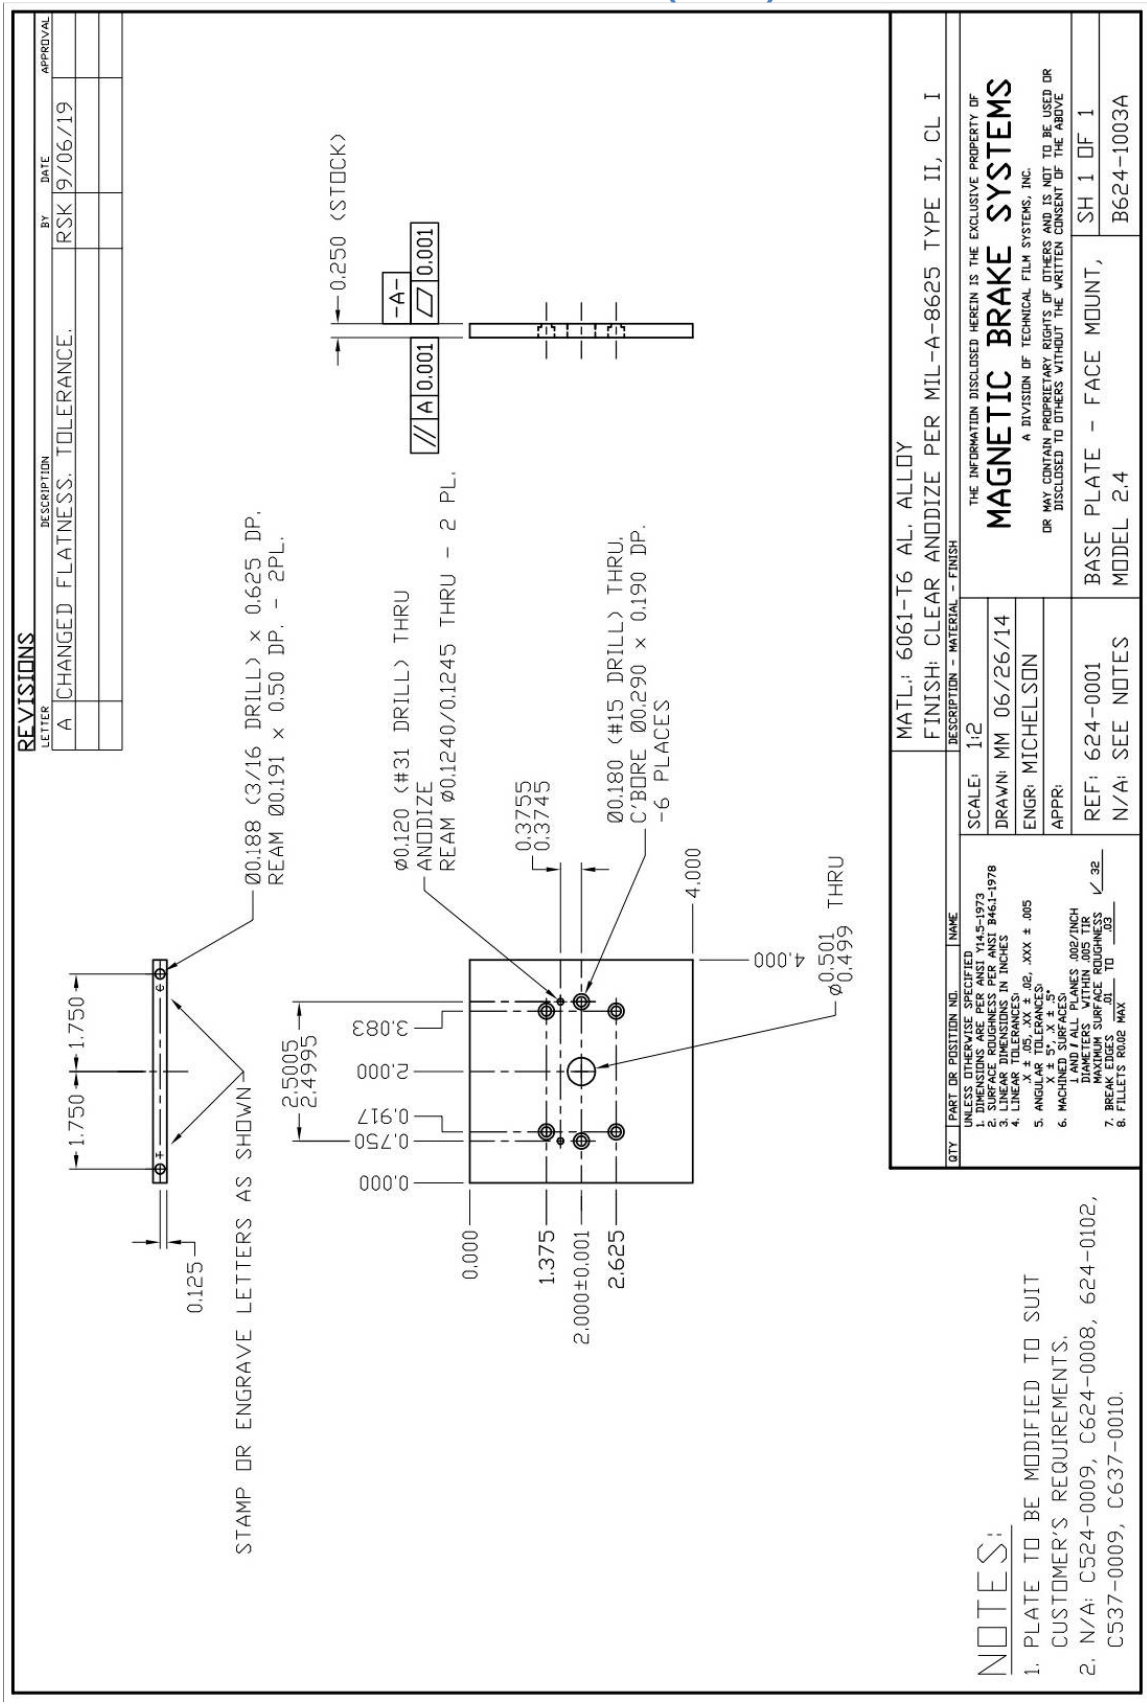

18. DYNAMOMETER LAYOUT – DB6M-2.4T-BM, L.C. ON MOTOR (OPTION 2)

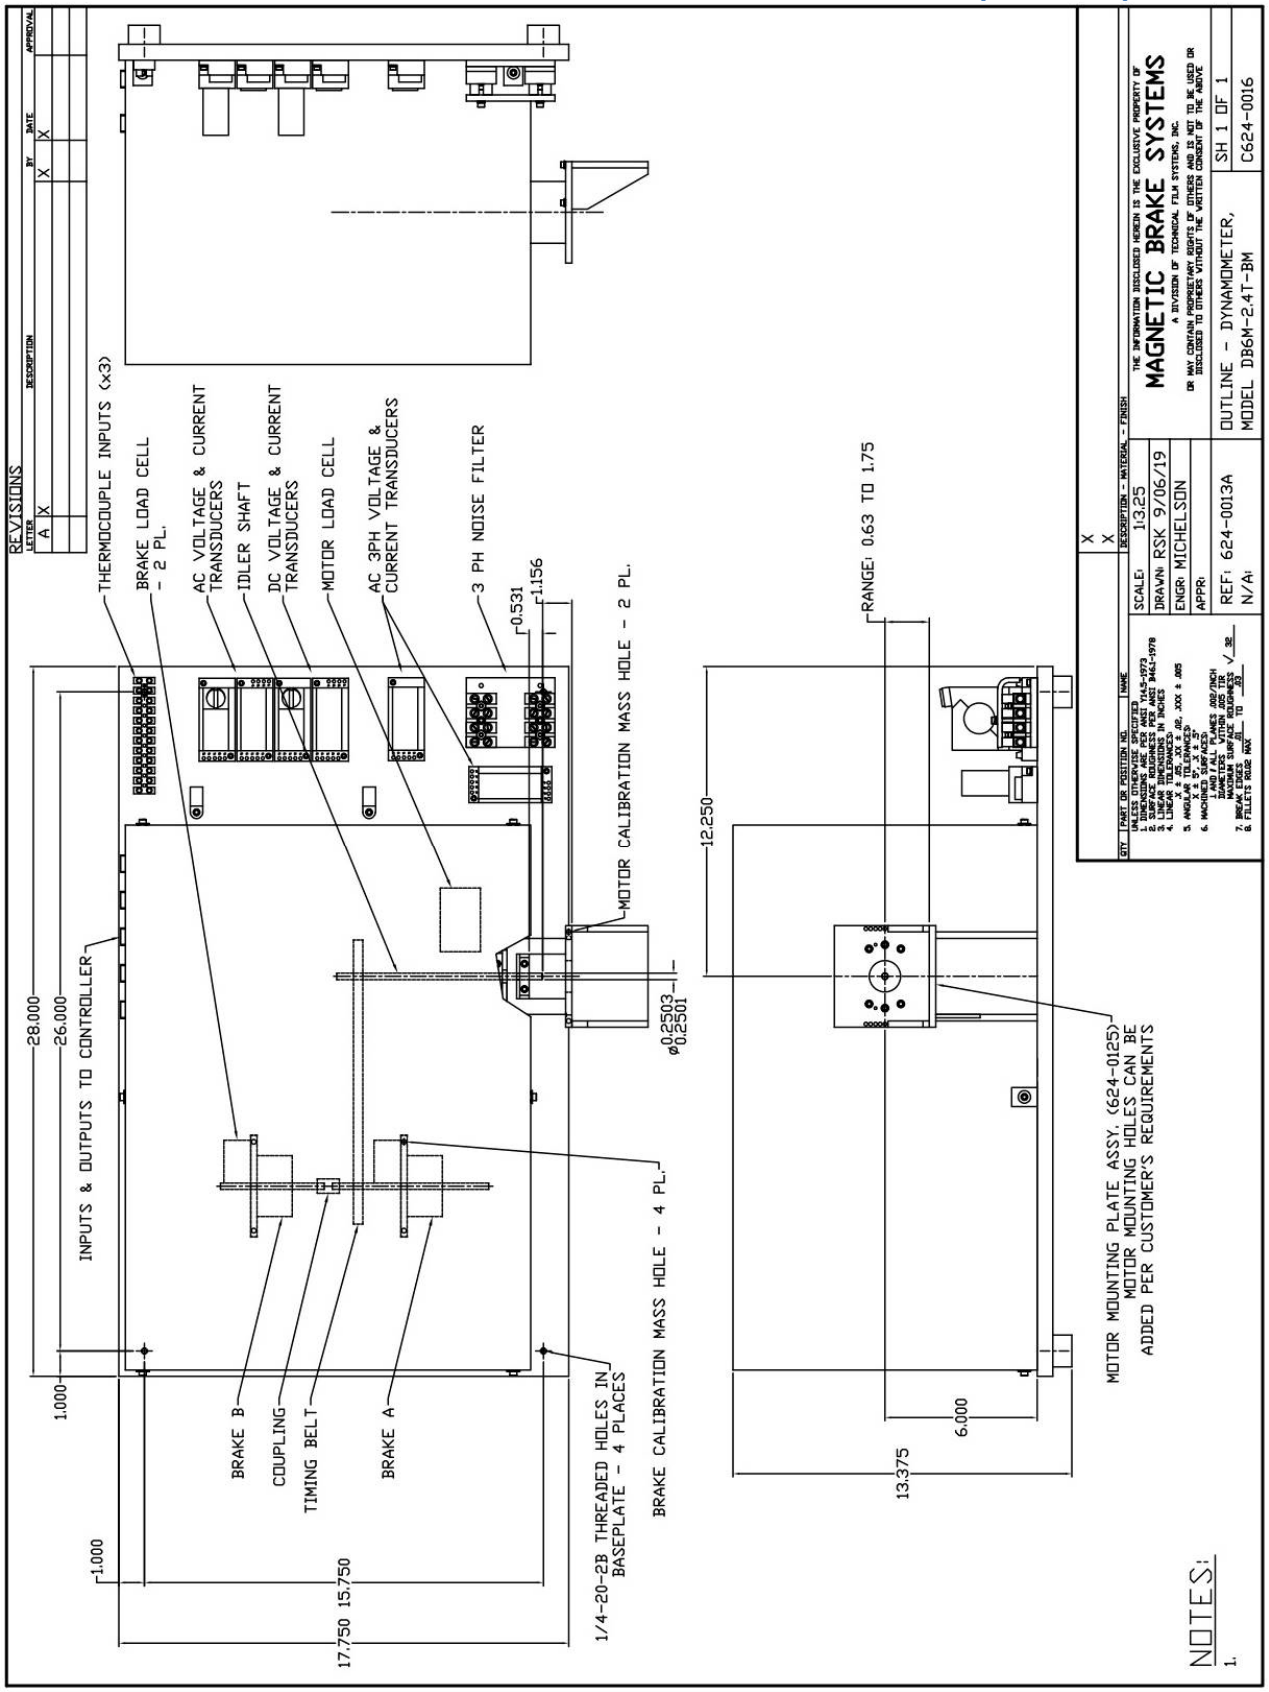

19. MOTOR MOUNTING PLATE – BASE MOUNT (DB6M)

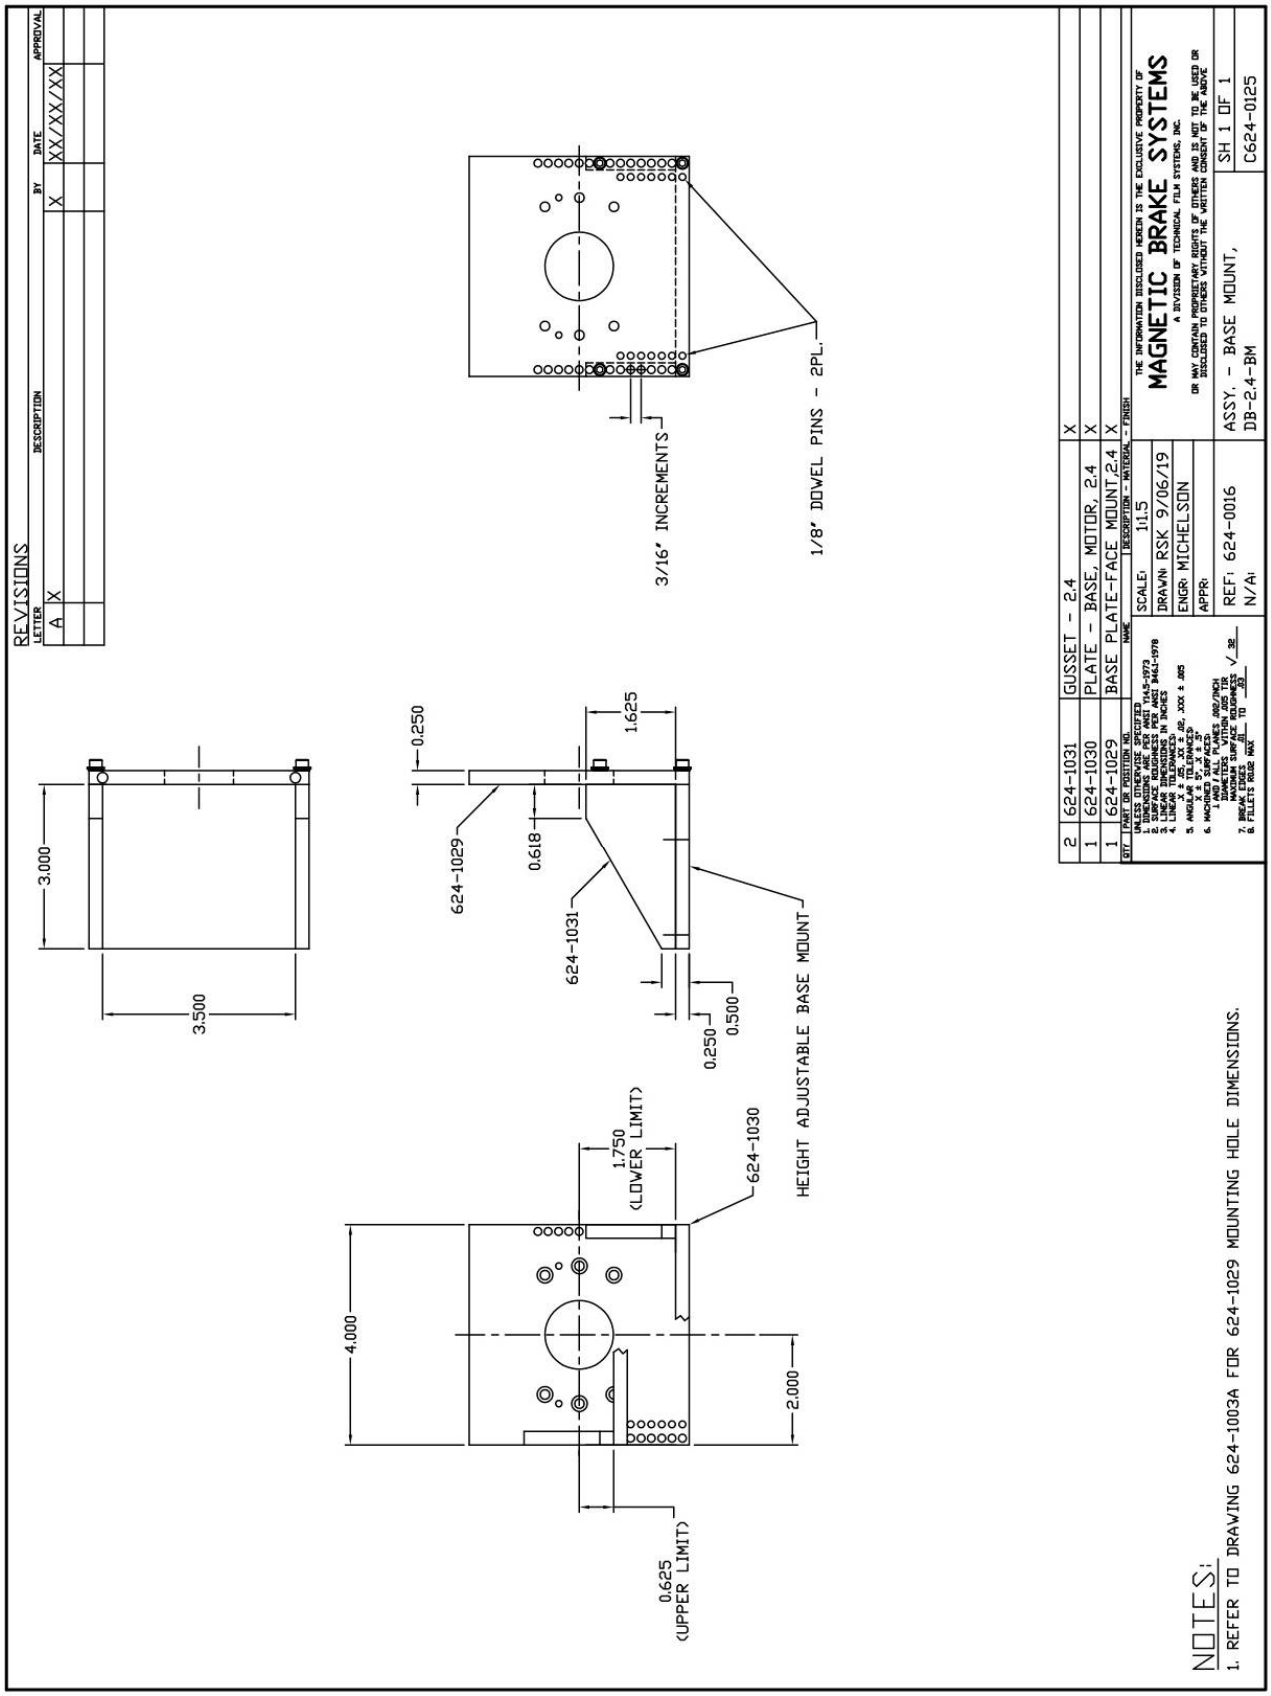

20. CONTROLLER LAYOUT

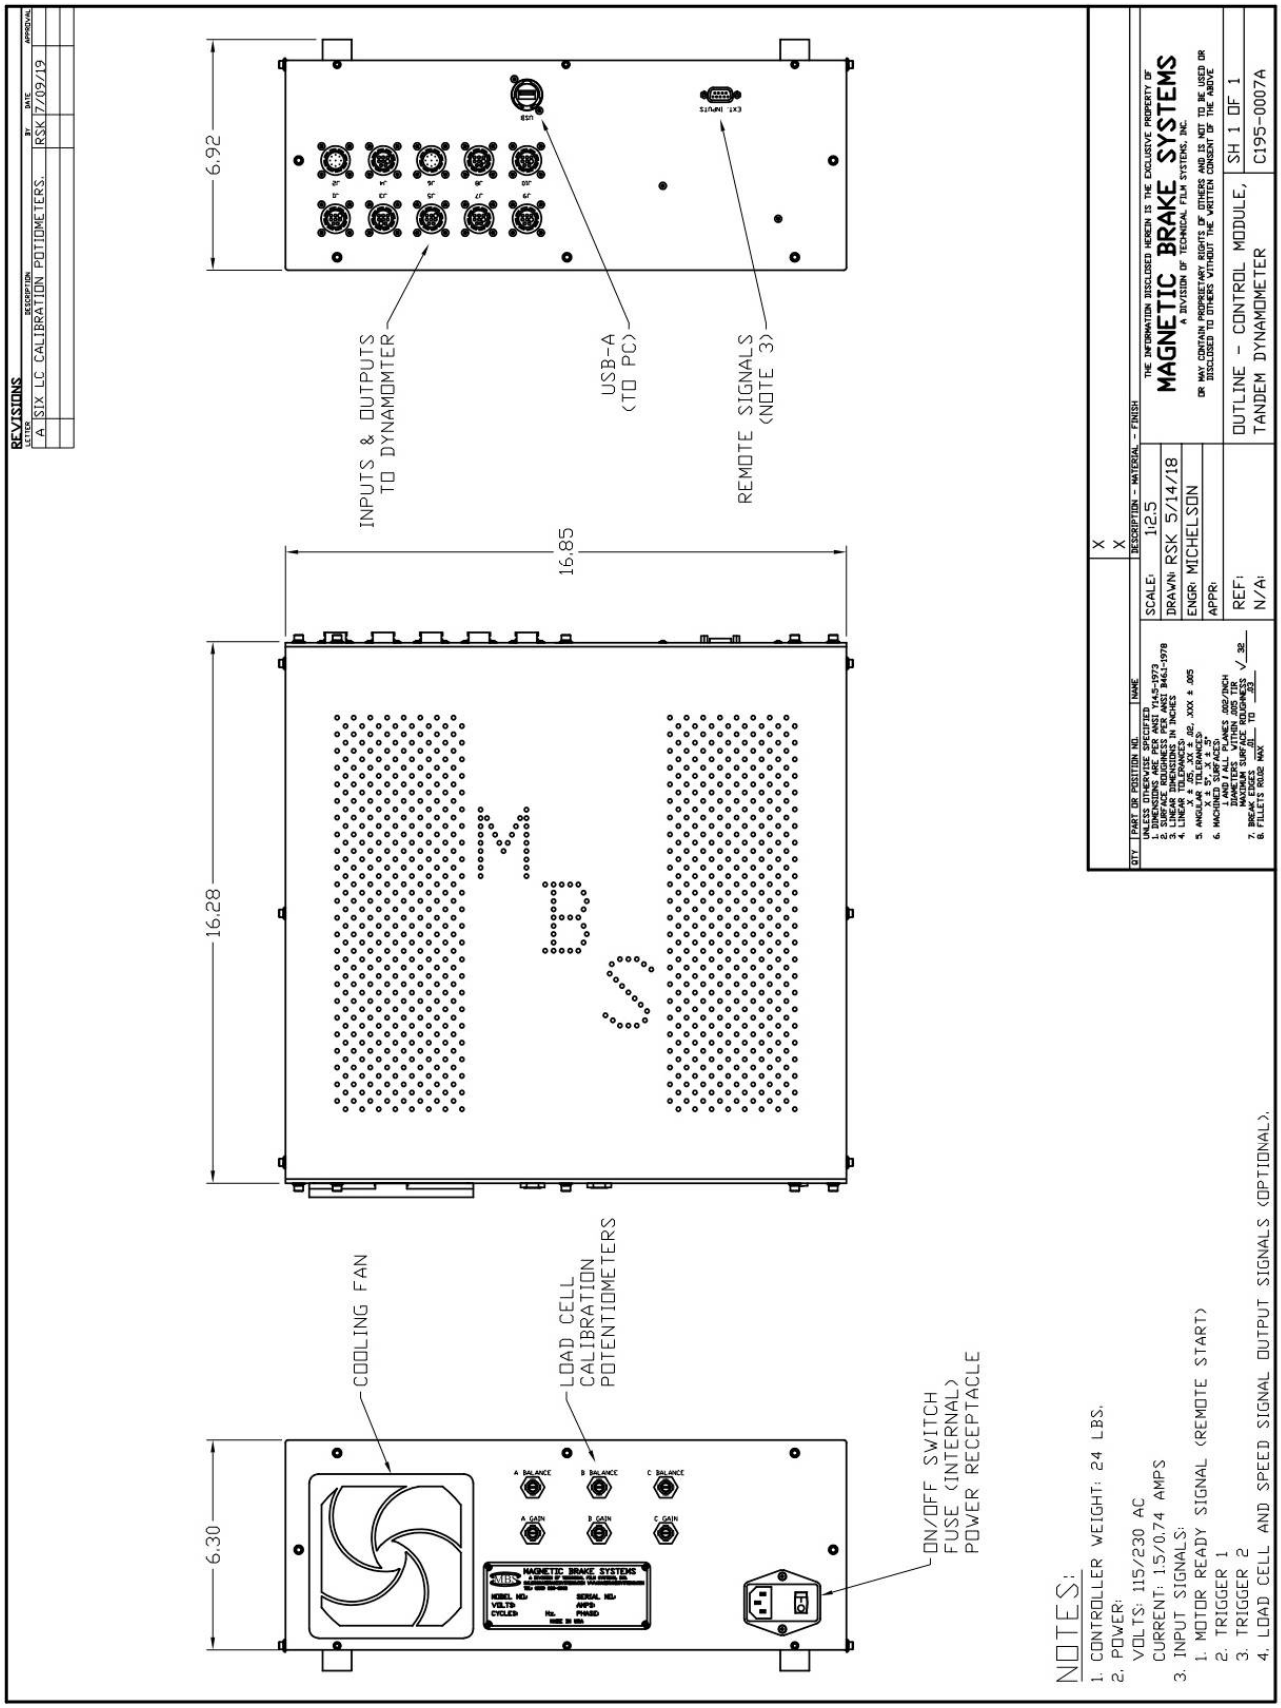

21. NOMENCLATURE OF DYNAMOMETER MODEL NUMBER

DB6M-8.7T-FM

Motor Mounting Style:
- **FM = Face Mount**
- **BM = Base Mount**
- **CB = Carriage Base**

Number of Brakes:
- **T = Tandem System**
- **Omitting T = single brake system**

Brake Size:
- **17.5 = MBZ-17.5 brake**
- **8.7 = MBZ-8.7 brake**
- **5.7 = MBZ-5.7 brake**
- **3.7 = MBZ-3.75 brake**
- **2.4 = MBZ-2.4 brake**

Load Cell Location:
- **M = Measuring Motor Torque**
- **B = Measuring Brake Torque**

Centerline Distance:
- **3 = 3 inches from top of baseplate to centerline of motor shaft.**
- **6 = 6 inches from top of baseplate to centerline of motor shaft**

System Type:
- **B = Belt Coupled system**
- **I = Inline system**

D = Dynamometer

The load cell(s) size(s) and type(s) of voltage & Current transducers are to be specified individually.